



INVEST IN THE FUTURE

CHARGE



CHARGERS - BATTERY SUPPORT UNITS - BOOSTERS - STARTERS
TESTERS - PORTABLE ENERGY - JUMPER CABLES - EV CHARGING - ACCESSORIES

2026

Prices may change.
Check updated prices
via the QR code.



A solid
manufacturing
group

900 people

C1+
Credit Rating
Banque de France

€ 140 000 000

55 000 m²
2 factories



FRENCH MANUFACTURER
SINCE 1964

A family
company



Nicolas & Bruno
Bouygues



Global coverage
125 countries

5 catalogues
3 500+ references



MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Stud welding
Spot welding
Accessories
Protection
Consumables



Spot welding
Dent pulling
MIG-MAG/
GMAW-FCAW
Plasma cutting
Induction heating
Riveting
Lifting
Bodyshop tools



Chargers
Battery support units
Boosters
Starters
Testers
Portable energy
Jumper cables
EV charging
Accessories



Releasing
Shrink-fitting
Stripping
Straightening
Dent removal
Bending
Brazing



MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Charge



GYS FRANCE - HEADQUARTERS
Laval

**GYS LOGISTICS
CENTER**
Laval



GYS GERMANY
Aachen



GYS U.K.
Rugby



GYS CHINA
Shanghai



GYS ITALIA
Venezia



GYS IBERICA
Madrid

Table of contents

CHARGERS & BATTERY SUPPORT UNIT	6 > 47
CHARGERS & STARTERS	48 > 51
BOOSTERS	52 > 71
ACCESSORIES	72 > 91



★★★★★ **THEY TRUST US** ★★★★★

ILS NOUS FONT CONFIANCE



LAND ROVER

JAGUAR

MERCEDES

smart

EvoBus



DODGE



VOLKSWAGEN GROUP



TESLA
APPROVED
COLLISION TOOLS, EQUIPMENT & CONSUMABLES



Jeep



TATA



EICHER



GM



KIA

红旗



BYD

NIO

Li Auto



BMW

MINI

MINI

LYNK&CO

ROLLS ROYCE



DAF



INVEST IN THE FUTURE



CHARGERS & BATTERY SUPPORT UNITS

6 - 12 - 16 - 24 - 36 - 48 V

CHARGERS - GYSFLASH

GYSFLASH Pb	6
GYSFLASH LITHIUM	9
GYSFLASH Pb / LITHIUM	10
GYSFLASH ON BOARD	18

CONVERTER DC/DC

ENERGYS DC · DC CHARGER	19
-------------------------	----

BATTERY SUPPORT UNITS

GYSFLASH PRO	20
GYSFLASH PRO CNT	22
STARTFLASH	28
BATTERY BALANCING	30
CONNECTED TECHNOLOGY & ACCESSORIES	34

MORE CHARGERS

ARTIC	40
ENERGY / TCB	41
CT / CA / WATTMATIC	42
BATIUM	44
DIAG-BATIUM	46
MULTICHARGE STATION	47



GYSFLASH Pb

CHARGERS Pb



HERITAGE • 6/12V

GYSFLASH 6 HERITAGE

0.8/6 A



029538 97,00 €HT

DESIGN
GYS
FRANCE

MADE IN
GYS CHINA

 PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	 50 / 60 Hz	 Power	 I _{charge}	 V	 Charge	 Maintenance	 Z _z	Ondulation / Ripple	Charging curve		IP				
	L × W × H cm / kg														
GYSFLASH 6 HERITAGE	220-240 V AC	2 m	90 W	0,8/6 A	6/12 V	1.2 › 125 Ah	1.2 › 170 Ah	<0.4 Ah / month	<150 mV Rms	IUoU	8 steps	IP 65	0.77 kg	19 × 10 × 5.2 cm	36.5 × 19.4 × 7 cm / 1
GYSFLASH 6.24	220-240 V AC	2 m	130 W	0,8/6 A	6/12 V	1.2 › 125 Ah	1.2 › 170 Ah	<0.4 Ah / month	<150 mV Rms	IUoU	7 step	IP 65	0.85 kg	19 × 10 × 5.2 cm	36.5 × 19.5 × 7 cm / 1
				0,8/4 A	24 V	1.2 › 100 Ah	1.2 › 140 Ah								
GYSFLASH 9.24	220-240 V AC	2 m	190 W	9 A	6/12 V	18 › 220 Ah	18 › 300 Ah	<0.4 Ah / month	<100 mV Rms	IUoU	8 step	IP 65	1.1 kg	22.1 × 11.1 × 5.8 cm	36.5 × 19.5 × 7 cm / 1.3
				6 A	24 V	15 › 125 Ah	15 › 170 Ah								

YouTube



PLAYLIST
GYSFLASH



6/12/24V

GYSFLASH 6.24


0.8/6 A



029460 113,00 €HT

GYSFLASH 9.24

9 A



029477 163,00 €HT

GYSFLASH TECHNOLOGY

SSM

Save and load settings. Automatic restart in case of power cut.

Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.

Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :

Compatible with Start/Stop vehicles.

Compatible véhicules Start/Stop.

Geeignet für START-STOP- Fahrzeuge.

CAN BUS



Can Bus ready: compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12V socket (cable is optional).

Can bus ready : compatible avec la technologie Can Bus, le Gysflash se branche directement sur la prise 12 V de la moto (câble en option).

Can-Bus Ready: Mit der Can-Bus Technologie kompatibel. Das GYSFLASH wird direkt an den 12V-Anschluss des Motorrads angeschlossen (Kabel optional).



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.

Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.

Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).



Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.


Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.

Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungtemperatur entsprechend ein.

SMART CHARGE 7 STEP / 8 STEP / 8 STEP LiFePO₄

Pb

1. Status analysis
2. Recovery
3. Test desulphation
4. Desulphation
5. Fast charge 80%
6. Absorption
7. Refresh (for "8 step" only)
8. Floating 100%



REFRESH 8 STEP


Rebalancing of the battery cells for greater longevity (not available on all models).

Rééquilibrage des cellules de la batterie pour plus de longévité (suivant modèle).

Regenerierung der Batteriezellen für eine längere Lebensdauer (je nach Modell).

LiFePO₄ (LFP)

1. UVP Wake up - Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)

Battery reactivation when in UVP protection.

Réactivation de la batterie en protection UVP.

Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System

Balancing of the battery cells.

Équilibrage des cellules.

Ausgleich der Batteriezellen.



GYSFLASH LITHIUM

CHARGERS LiFePO₄



12V

GYSFLASH 1.12 Lithium

1 A



029675 60,00 €HT

GYSFLASH 6.12 Lithium

4/6 A



029729 99,00 €HT

DESIGN
GYS FRANCE
MADE IN
GYS CHINA

DESIGN GYS FRANCE MADE IN GYS CHINA			Power						Ondulatio / Ripple	Charging curve		IP				L × W × H cm / kg
GYSFLASH 1.12 Lithium	220-240 V AC	1 m	18 W	1 A	12 V	0.5 , 20 Ah	0.5 , 50 Ah	<0.4 Ah/ month	<150 mV Rms	IUoU	8 step	IP 65	0.44 kg	13 × 8 × 3.8 cm	29.7 × 15 × 5.7 / 0.6	
GYSFLASH 6.12 Lithium	220-240 V AC	2 m	90 W	4/6 A	12 V	1.2 , 125 Ah	1.2 , 170 Ah	<0.4 Ah/ month	<150 mV Rms	IUoU	8 step	IP 65	0.77 kg	19 × 10 × 5.2 cm	36.5 × 19.5 × 7 / 1	



CHARGERS


Pb / LiFePO₄



12V

GYSFLASH 1.12 PL & 1.12 PL S

1 A

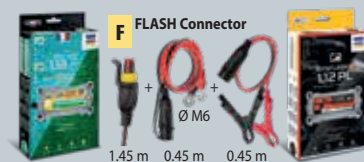


1.12 PL
026902 **66,00 €HT**

1.12 PL S (110 V)
070851
072794
072824

GYSFLASH 8.12 PL

1/4 / 8 A



069282 **120,00 €HT**

GYSFLASH 18.12 PL

7/12 / 18 A

GO > 2 V




026926 **244,00 €HT**

OPTION

Gysflash 18.12 PL,
30.12 PL, 20.12/24 PL,
10.36/48 PL

Magnetfix 20
026063 **37,00 €HT**



x4



12/24V

GYSFLASH 30.12 PL

7/15 / 30 A



029668 **298,00 €HT**
026070

GYSFLASH 20.12/24 PL

7/15 / 20 A



026049 **293,00 €HT**
027558

PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN		 50 / 60 Hz		Power	I _{charge}	 V	 Charge	 Maintenance	 Z _z	Ondulation/ Ripple	 Charging curve	 IP			 L × W × H cm / kg	
DESIGN GYS FRANCE	GYSFLASH 1.12 PL	220-240 V AC	2 m	20 W	1 A	12 V	2 ; 32 Ah (Pb) 0.5 ; 20 Ah (LiFePO4)	2 ; 100 Ah (Pb) 0.5 ; 50 Ah (LiFePO4)	<0.4 Ah/ month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO4)	IP 65	0,69 kg	17 × 9 × 5.1 cm	33 × 17.5 × 6 / 0.8
	GYSFLASH 1.12 PL S	100-127 V AC														
MADE IN GYS CHINA	GYSFLASH 8.12 PL	220-240 V AC	2 m	130 W	1/4/8 A	12 V	2 ; 160Ah (Pb) 1.2 ; 160 Ah (LiFePO4)	2 ; 240Ah (Pb) 1.2 ; 240 Ah (LiFePO4)	<0.4 Ah/ month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO4)	IP 65	0,85 kg	19 × 10 × 5.2 cm	—
MADE IN FRANCE	GYSFLASH 18.12 PL	220-240 V AC	2 m	300 W	7/12/18 A	12 V	15 ; 270 Ah (Pb) 7 ; 270 Ah (LiFePO4)		<0.5 Ah/ month	<100 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO4)	IP 31	1,55 kg	19 × 19 × 7.3 cm	30 × 22 × 9 / 1.9

 PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN				Power	I _{charge}	 V	 Charge	 Maintenance	 Z _z	Ondulation/ Ripple	Charging curve		IP			 L × W × H cm /kg
		50 / 60 Hz														
MADE IN FRANCE	GYSFLASH 30.12 PL	220-240 V AC	2 m	500 W	7/15/30 A	12 V	15 > 375 Ah (Pb) 7 > 375 Ah (LiFePO4)		<0.5 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO4)	IP 31	1,85 kg	19 × 19 × 7.3 cm	30 × 22 × 9 / 2.2
	GYSFLASH 20.12/24 PL	220-240 V AC	2 m	500 W	7/15/20 A 7/15 A	12 V 24 V	15 > 300 Ah (Pb) 7 > 300 Ah (LiFePO4) 15 > 240 Ah (Pb) 7 > 240 Ah (LiFePO4)		<1 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO4)	IP 31	1,85 kg	19 × 19 × 7.3 cm	30 × 22 × 8.5 / 2.2

GYSFLASH TECHNOLOGY

SSM

Save and load settings. Automatic restart in case of power cut.
Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.
Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :
Compatible with Start/Stop vehicles.
Compatible véhicules Start/Stop.
Geeignet für START-STOP- Fahrzeuge.

Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.
Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.
Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).

t°

Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.
Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.
Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.

SMART CHARGE 7 STEP / 8 STEP

Pb

1. Status analysis

2. Recovery

3. Test desulphation

4. Desulphation

5. Fast charge 80%

6. Absorption

7. Floating 100%

LiFePO4 (LFP) / Li-ion

1. UVP Wake up

2. Status analysis

3. Recovery

4. Fast charge 90%

5. Test

6. Completion

7. Equalization

8. Floating 100%

UVP Wake up (Under Voltage Protection)

Battery reactivation when in UVP protection.
Réactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System

Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.

GYSFLASH Pb / LITHIUM

CHARGER Pb / LiFePO₄

INTENSIVE

SC SMART COOLING TECHNOLOGY

100% DUST PROOF

SILENT

IP 23
INDOOR / OUTDOOR

12V

GYSFLASH 32.12 PL

7/15 / 30 A

GO > 2 V SSM START STOP

2,5 m - 6 mm²

027381 450,00 €HT

	PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	50 / 60 Hz		Power	I _{charge}	V	Charge	Maintenance	Zz	Ondulation/ Ripple	Charging curve	IP			L x W x H cm / kg
MADE IN FRANCE	GYSFLASH 32.12 PL	230V	2.5 m	500W	7/15/30 A	12 V	10 > 400 Ah		<0.5 Ah/month	<150 mV Rms	IUoU	IP 23	4,7 kg	8 × 25 × 20 cm	36 × 27,5 × 20,5 / 4,6
	GYSFLASH 15.24 XTREM	230V	2.5 m	500W	7/10/15 A	12/24V	5 > 240 Ah		<1 Ah/month	<150 mV Rms	IUoU	IP 65	5,4 kg	7,5 × 25 × 21 cm	27 × 20 × 36 / 5,4

GYSFLASH Pb

CHARGER Pb

INTENSIVE

SHOCK RESISTANT

IP 65
INDOOR / OUTDOOR

12 / 24V

GYSFLASH 15.24 XTREM

15 A

GO > 2 V SSM START STOP

5 m - 4 mm²

025813 560,00 €HT

INCLUDED

Fixing kit

for Gysflash 32.12 PL, 15.24 XTREM

OPTIONS

NATO CONNECTOR

026780 99,00 €HT

NATO OTAN

2 pts/NATO Spiral

5 m

026968 385,00 €HT

NATO OTAN

2 pts/NATO

5 m - 4 mm²

025837 255,00 €HT

NATO OTAN

2 pts/DIN 1490

Emergency vehicle

5 m

028777 210,00 €HT

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.
Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.
Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.
Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.
Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).



Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.
Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.
Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.

GYSFLASH Pb / LITHIUM

ELECTRO MOBILITY CHARGERS
Pb / Lithium

LiFePO₄ / Li-ion / Li-Po /
NMC / LCO / MCO / NCA...



24 V • ELECTRICAL MOBILITY

GYSFLASH 6.24 PL

6 A **GO > 2 V**

GO > 2 V SSM

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion

S SAE Connector

1.45 m 0.45 m 0.45 m

027398 161,00 €HT



48 • INDUSTRY / ELECTROMOBILITY

GYSFLASH 3.48 PL

3 A **GO > 5 V**

GO > 5 V SSM

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion

S SAE Connector

1.45 m 0.45 m

027893 150,00 €HT



36 / 48 • INDUSTRY / ELECTROMOBILITY

GYSFLASH 10.36/48 PL

10 A **GO > 5 V**


GO > 5 V SSM

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion

A ANDERSON Connector

1.9 m (4 mm²)

027060 298,00 €HT



OPTION
Magnetfix
20
026063 37,00 €HT

ELECTROMOBILITY

MOBILITY



OUTDOOR



INDUSTRY



MEDICAL




SMART CHARGE

7 STEP / 8 STEP


Pb

1. Status analysis
2. Recovery
3. Test desulphation
4. Desulphation
5. Fast charge 80%
6. Absorption
7. Floating 100%



LiFePO₄ (LFP) / Li-ion

1. UVP Wake up
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.
Reactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System
Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.






DESIGN GYS FRANCE	PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	50 / 60 Hz	Power	I _{charge}	V	n cell			Charge	Maintenance	Z _z	Ondulation/Ripple	Charging curve	IP	1,1 kg	22.1 × 11.1 × 5.8 cm	L × W × H cm / kg
						Pb	LFP	NMC									
MADE IN GYS CHINA				6 A	24 V	12	8	6	15 > 125 Ah (Pb) 2 > 125 Ah (Li)	15 > 170 Ah (Pb) 2 > 170 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	36.3 × 19.3 × 6.7 cm / 1.4
					48 V	24	15/16	13/14	6 > 60 Ah (Pb) 3 > 60 Ah (Li)	6 > 60 Ah (Pb) 3 > 60 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	36 × 19.5 × 7 cm / 1.2
MADE IN FRANCE				10 A	36 V	18	12	9	20 > 230 Ah (Pb) 10 > 230 Ah (Li)	20 > 230 Ah (Pb) 10 > 230 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 31	1,85 kg	19 × 19 × 7.3 cm
				8 A	48 V	24	15/16	13/14	15 > 160 Ah (Pb) 8 > 160 Ah (Li)	15 > 160 Ah (Pb) 8 > 160 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 31	1,85 kg	22 × 30 × 8 cm / 2





F Flash Connector

GYSFLASH ≤ 6A : 1.12 / 4.12 / 6.12 / 6 Heritage / 6.24 / 1.12 Li / 6.12 Li / 1.12 PL

Flash Connector		GYSFLASH ≤ 6A : 1.12 / 4.12 / 6.12 / 6 Heritage / 6.24 / 1.12 Li / 6.12 Li / 1.12 PL						
 F1 / Clamps L 0.45 m (1.3 mm²) All 12V LEAD 026889 13,90 € HT	 F2 / Charge indicator L 0.56 m (1.3 mm²) All 12V LEAD 029149 23,90 € HT	 F3 / Eyelets ● M6 L 0.45 m (1.3 mm²) All 12V 029194 10,90 € HT ● M8 L 0.45 m (1.3 mm²) 24V 36V 48V 027626 10,90 € HT	 F4 / Charge indicator eyelets ● M6 L 0.56 m (1.3 mm²) All 12V LEAD 029200 20,90 € HT	 F5 / Cigarette lighter L 0.45 m (0.82 mm²)  029439 18,90 € HT	 F6 / Cable L 2.50 m (1.3 mm²) All 029057 15,70 € HT	 F7 / Connector MLX L 0.45 m (1.3 mm²)  027589 10,10 € HT	 F8 Adapter S / F - F / S L 0.45 m (1.3 mm²)  027480 11,90 € HT	 F9 Adapter F / A L 0.45 m (1.3 mm²)  025820 16,90 € HT

s SAE Connector

GYSFLASH < 16A : 8.12 PL / 12.12 / 9.24 / 6.24 / 3.48 PL

 s SAE Connector GYSFLASH < 16A : 8.12 PL / 12.12 / 9.24 / 6.24 / 3.48 PL							
							
S1 / Clamps L 1.50 m (1.3 mm ²) All  +Showroom Gysflash 1212 027688 13,30 € HT	S2 / Eyelets • M6 L 0.45 m (1.3 mm ²) 12V 24V 027466 10,10 € HT • M8 L 0.45 m (1.3 mm ²) 24V 36V 48V 027633 10,10 € HT • M10 L 0.45 m (1.3 mm ²) 36V 48V 027640 10,10 € HT	S3 / XLR 3 pin L 0.45 m (1.3 mm ²)  027428 10,10 € HT	S4 / T-Bar L 0.45 m (1.3 mm ²)  027442 19,20 € HT	S5 Adapter S / A L 0.45 m (1.3 mm ²)  027473 15,20 € HT	S6 KIT SAE / JACK (max 5 A) L 0.45 m (1.3 mm ²) 025646 21,20 € HT	S7 / Cigarette lighter (max 10 A) Only for 8.12 PL L 0.45 m (1.3 mm ²) 077331 13,10 € HT	S8 / Cable L 2.5 m (1.3 mm ²) 077348 14,30 € HT

A ANDERSON Connector

GYSFLASH < 40A : 18.12 PL / 30.12 PL / 20.12-24 PL / 10.36-48 PL



A

ANDERSON Connector

GYSFLASH < 40A : 18.12 PL / 30.12 PL / 20.12-24 PL / 10.36-48 PL







A1 / Clamps



L 1.90 m (4 mm²) 026094 **26,30 € HT**

L 6 m (4 mm²) 027435 **43,40 € HT**

A2 / Eyelets

4 mm²

12V 24V

027657 **14,30 € HT**

24V 36V 48V

027664 **13,30 € HT**

24V 36V 48V

027794 **20,30 € HT**

36V 48V

027671 **13,30 € HT**


A3 / Anderson

L 1.5 m (4 mm²)

027855 **24,30 € HT**

XTREM CABLES

GYSFLASH 15.24 XTREM

 XTREM CABLES		GYSLASH 15.24 XTREM	
			
2pts/NATO Spiral 5 m 028968 385,00 € HT	 2pts/NATO 5 m - 4 mm² 025837 255,00 € HT	 2pts/NATO 5 m - 4 mm² 025837 255,00 € HT	2pts/DIN14690 Emergency vehicle 5 m 028777 210,00 € HT

SELECT THE RIGHT GYSFLASH

CHOISISSEZ VOTRE GYSFLASH • WÄHLEN SIE IHR GYSFLASH AUS

GVYFLASH						MEDICAL SERVICE - LEISURE				MOTORBIKE LIGHT MOBILITY				AUTO - CAMPER VAN - TRUCK							MARINE				INDUS TRY		URBAN																																																																																																																																																																																												
																																																																																																																																																																																																																							
	6V	12V	24V	36V	48V																																																																																																																																																																																																																		
																																																																																																																																																																																																																							

Pb

[illegible]

LiFePO₄

[illegible]

Li-ion

[illegible]

M = maintenance only



BSU

BATTERY SUPPORT UNITS

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration



NEW DESIGN 2026



OLD DESIGN



YouTube
PLAYLIST
GYSFLASH PRO


✓ SHOWROOM



10.5 cm



NEW DESIGN
02 / 2026

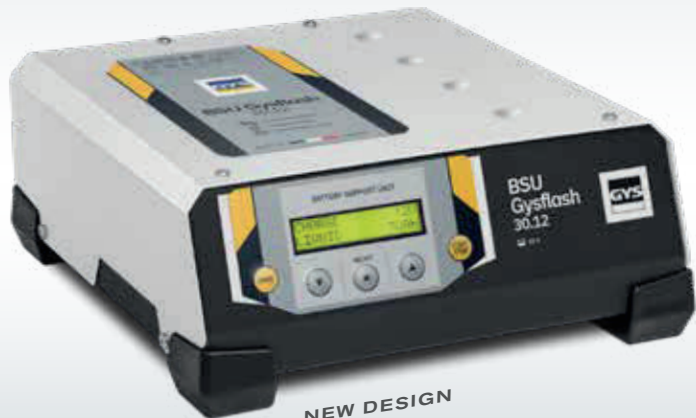

NEW DESIGN
02 / 2026



NEW DESIGN
02 / 2026



22 languages

- GB DK CZ
- FR FI PL
- DE TR SK
- NL HR UA
- ES GR
- PT HU
- IT CN simplified
- RU CN traditional
- SE JP

PFC POWER FACTOR CORRECTION

FV FLEXIBLE VOLTAGE

85 V 265 V



NEW DESIGN
01 / 2026

12 V

GYSFLASH 30.12

30 A

PFC SC

2,5 m - 6 mm²

029224 635,00 €HT



GYSFLASH 50.12 FV

50 A

PFC FV SC

1 044 40004

2,5 m - 10 mm²

026056 765,00 €HT



GYSFLASH 100.12

100 A

PFC SC

2,5 m - 16 mm²

029071 825,00 €HT

029453



5 m - 16 mm²

029415 840,00 €HT

029002

082304

6 / 12 / 24 V

GYSFLASH 30.24

30 A

PFC SC

2,5 m - 6 mm²

029231 635,00 €HT



GYSFLASH 50.24

50 A

PFC SC

2,5 m - 10 mm²

029095 757,00 €HT



5 m - 10 mm²

029620 817,00 €HT

GYSFLASH 102.12

100 A

PFC SC

5 m - 16 mm²

029606 920,00 €HT

082311



INCLUDED

Fixing kit
for Gysflash 102.12



SC

SMART COOLING TECHNOLOGY


100% DUST PROOF



SILENT


SMART PB & LiFePO₄

Pb : 8-step



1. Status analysis
2. Recovery
3. Sulphation test
4. Desulphation
5. Fast charge 80%
6. Absorption
7. Refresh
8. Floating 100%

LiFePO₄ : 7-step



1. Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Completion
6. Equalization
7. Floating 100%

CHARGE

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ EXPERT

Pb TRACTION

- ✓ GEL
- ✓ LIQUID

LITHIUM READY

- ✓ LFP/LiFePO₄

BSU

DIAG +



U2 ADJUSTABLE


SHOWROOM



CHANGE BATTERY



POWER SUPPLY



U2 & I2 max ADJUSTABLE

MADE IN FRANCE

MADE IN FRANCE	 50 / 60 Hz				 I max	25°C @100 %	40°C @ 100 %		START MINI	IP	 TRACTION BATTERIES	 L	 mm²	 SHOWROOM CONNECT			
	L × W × H cm / kg																
GYSFLASH 30.12	220 › 240 V	540 W	2.5 m	12 V	30 A	30 A	30 A	10 › 400 Ah	2 V	21	—	2,5 m	6	Ø M6	2.8 kg	25.5 × 10.5 × 23 cm	41.4 × 31.1 × 25 / 4.9
GYSFLASH 50.12 FV	100 › 240 V	850 W	2.5 m	12 V	50 A	50 A	40 A	10 › 600 Ah	2 V	21	—	2,5 m	10	Ø M6	4.4 kg	30 × 10.5 × 29.2 cm	41 × 39 × 22.5 / 6.5
GYSFLASH 100.12	220 › 240 V	1600 W	2.5 m	12 V	100 A	75 A	66 A	20 › 1200 Ah	2 V	21	—	2,5 m 5 m	16	Ø M6	4.7 kg	32 × 10.5 × 29.2 cm	41 × 39 × 22.5 / 7.2 41 × 39 × 22.5 / 8
GYSFLASH 30.24	220 › 240 V	540 W	2.5 m	6 V/12 V 24 V	30 A 15 A	30 A 15 A	30 A 15 A	10 › 400 Ah	2 V	21	●	2,5 m	6	Ø M6	2.8 kg	25.5 × 10.5 × 23 cm	41.4 × 31.1 × 25 / 4.9
GYSFLASH 50.24	220 › 240 V	1600 W	2.5 m	6 V/12 V 24 V	50 A 45 A	50 A 45 A	50 A 45 A	10 › 600 Ah	2 V	21	●	2,5 m 5 m	10	Ø M6	4.4 kg	30 × 10.5 × 29.2 cm	41 × 39 × 22.5 / 6.5 41 × 39 × 22.5 / 7.9
GYSFLASH 102.12	220 › 240 V	1600 W	2.5 m	12 V	100 A	75 A	66 A	20 › 1200 Ah	2 V	21	—	5 m	16	Ø M6	5.5 kg	34.4 × 29.1 × 12 cm	41 × 39 × 22.5 / 8.7



GYSFLASH PRO CNT

BSU

BATTERY SUPPORT UNITS

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration

12 V (factory preset)
16/24 V READY

Use custom configuration tool
(detail p.34)



NEW DESIGN
01 / 2026



NEW DESIGN
02 / 2026



NEW DESIGN
02 / 2026



NEW
DESIGN
2026



OLD DESIGN

CNT

Connected
Technology

FULLY
CUSTOMIZABLE
p.34



NEW DESIGN
02 / 2026



NEW DESIGN
02 / 2026

22 languages

GB DK CN simplified
FR FI CN traditional
DE TR JP
NL HR
ES GR
PT CZ
IT PL
RU SK
SE UA
HU

FV FLEXIBLE
VOLTAGE

85 V 265 V
110 V 230 V

PFC POWER FACTOR
CORRECTION

16 V

COMPATIBLE WITH
16V BATTERIES

✓ SHOWROOM



10.5 cm 13 cm
51.12 CNT 101.12 CNT
121.12 CNT FV 125.12 CNT FV
101.24 CNT FV 51.48 CNT FV

GYSFLASH PRO CNT

BATTERY SUPPORT UNITS

12 V

GYSFLASH 51.12 CNT FV

50 A

PFC FV SC CNT

2,5 m - 10 mm²
068179



GYSFLASH 101.12 CNT FV

100 A

PFC FV SC CNT

2,5 m - 16 mm²
025790

5 m - 16 mm²
026988



GYSFLASH 121.12 CNT FV

120 A

PFC FV CNT

5 m - 25 mm²
026971

027756 071605 082298

no accessories
027923



GYSFLASH 125.12 CNT FV

120 A

PFC FV CNT

5 m - 25 mm²
028883

082274



6 / 12 / 16 / 24 V

GYSFLASH 101.24 CNT FV

100 A

PFC FV CNT

5 m - 25 mm²
025967



6 / 12 / 16 / 24 / 36 / 48 V

GYSFLASH 51.48 CNT FV

50 A

PFC FV CNT

5 m - 10 mm²
072015



SC

SMART
COOLING
TECHNOLOGY


100%
DUST
PROOF



SILENT



SMART 9 STEP

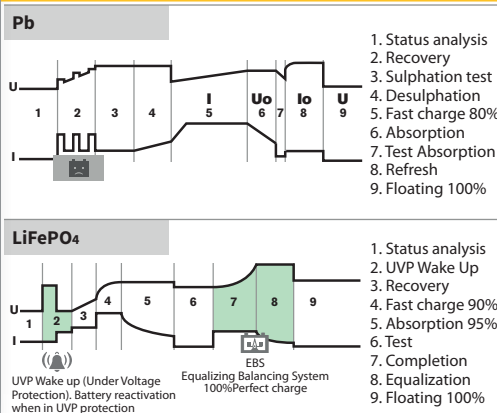

CHARGE (150 CURVE CAPACITY)

- Pb AUTOMOTIVE**
- ✓ GEL
 - ✓ AGM
 - ✓ LIQUID
 - ✓ EASY
 - ✓ NORMAL
 - ✓ BOOST
 - ✓ RECOVERY+
 - ✓ and more
- Pb TRACTION**
- ✓ GEL
 - ✓ LIQUID
 - ✓ and more
- LITHIUM**
- ✓ LFP/LiFePO₄
 - ✓ LI-ION STD
 - ✓ LFP CELL+
 - ✓ LI-ION CELL+
 - ✓ and more

BSU (10 CURVE CAPACITY)

- DIAG +**
- SHOWROOM**
- CHANGE BATTERY**
- POWER SUPPLY**
- AND MORE**
- ✓ TEST**
- ✓ VOLTAGE
 - ✓ START UP
 - ✓ ALTERNATOR
- ✓ STARTER**
- ✓ START

Connected Modules & Technology p.36



MADE IN FRANCE

MADE IN FRANCE	 50 / 60 Hz			I max	25°C @ 100 %	40°C @ 100 %		START MINI	IP	 L ↕	 mm²	 TRACTION BATTERIES	 SHOWROOM CONNECT			 L × W × H cm / kg	
GYSFLASH 51.12 CNT FV	220 > 240 V	1600 W	2.5 m	12 V	50 A	230 V : 50 A 110 V : 40 A	230 V : 40 A 110 V : 27 A	10 > 600 Ah	1 V	41	2,5 m	10	●	Ø M6	4,6 kg	30 × 10,5 × 29,2 cm	41 × 39 × 22,5 / 6,8
	100 > 127 V	800 W		24 V	230 V : 50 A 110 V : 25 A	230 V : 44 A 110 V : 25 A											
GYSFLASH 101.12 CNT FV	220 > 240 V	1600 W	2.5 m	12 V	230 V : 100 A 110 V : 50 A	230 V : 75 A 110 V : 45 A	230 V : 66 A 110 V : 40 A	20 > 1200 Ah	1 V	21	2,5 m	16	●	Ø M6	5,1 kg	32 × 10,5 × 29,2 cm	41 × 39 × 22,5 / 7,5
	100 > 127 V	800 W									5 m						41 × 39 × 22,5 / 8,6
GYSFLASH 121.12 CNT FV	220 > 240 V	2000 W	2.5 m	12 V	230 V : 120 A 110 V : 100 A	230 V : 110 A 110 V : 75 A	230 V : 90 A 110 V : 55 A	20 > 1500 Ah	1 V	20	5 m	25	●	Ø M6	5,9 kg	32,5 × 13 × 27,2 cm	41 × 39 × 22,5 / 10,4
	100 > 127 V	1500 W															
GYSFLASH 125.12 CNT FV	220 > 240 V	2000 W	2.5 m	12 V	230 V : 120 A 110 V : 100 A	230 V : 120 A 110 V : 100 A	230 V : 116 A 110 V : 77 A	20 > 1500 Ah	1 V	40	5 m	25	●	Ø M6	6,3 kg	33,4 × 13 × 28 cm	41 × 39 × 22,5 / 10,8
	100 > 127 V	1500 W															
GYSFLASH 101.24 CNT FV	220 > 240 V	3200 W	2.5 m	6/12 V	100 A	110 V : 72 A 230 V : 89 A	110 V : 47 A 230 V : 68 A	20 > 1200 Ah	1 V	20	5 m	25	●	Ø M6	6 kg	32,5 × 13 × 27,2 cm	41 × 39 × 22,5 / 10,5
	100 > 127 V	1500 W		24 V	230 V : 100 A 110 V : 50 A	230 V : 76 A 110 V : 50 A	230 V : 59 A 110 V : 35 A										
GYSFLASH 51.48 CNT FV	220 > 240 V	3200 W	2.5 m	6/12/24 V	50 A	230 V : 49 A 110 V : 44 A	230 V : 39 A 110 V : 21 A	10 > 600 Ah	1 V	20	5 m	10	●	Ø M6	5,6 kg	32,5 × 13 × 27,2 cm	41 × 39 × 22,5 / 9
	100 > 127 V	1500 W		36/48 V	230 V : 50 A 110 V : 25 A	230 V : 45 A 110 V : 26 A	230 V : 35 A 110 V : 19 A										



GYSFLASH PRO CNT

BSU

BATTERY SUPPORT UNITS

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration




22 languages

GB NL IT DK HR PL UA CN simplified
FR ES RU FI GR SK CN traditional
DE PT SE TR CZ HU JP



INCLUDED

Fixing kit



OPTIONS



CNT

Connected Technology

FULLY CUSTOMIZABLE
p.34

PFC POWER FACTOR CORRECTION

16 V COMPATIBLE WITH 16V BATTERIES

FV FLEXIBLE VOLTAGE

85 V 265 V

12 V

GYSFLASH 103.12 CNT FV

100 A

PFC FV SC CNT

5 m - 16 mm²
072008



GYSFLASH 123.12 CNT FV

120 A

PFC FV CNT

5 m - 25 mm²
025677



6 / 12 / 16 / 24 V

GYSFLASH 53.24 CNT FV

50 A

PFC FV CNT SC 16 V

5 m - 10 mm²
082540



GYSFLASH 103.24 CNT FV

100 A

PFC FV CNT 16 V

5 m - 25 mm²
025684



SC


SMART COOLING TECHNOLOGY

100% DUST PROOF



SILENT

SMART 9 STEP

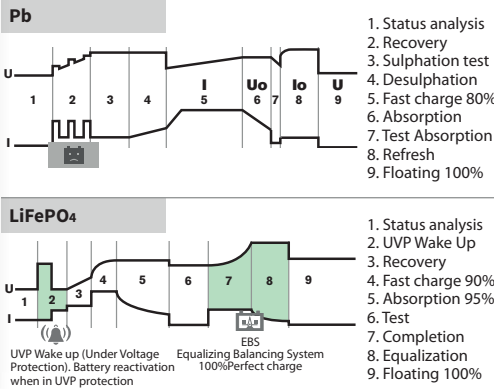

CHARGE

(150 CURVE CAPACITY)

- ✓ GEL
 - ✓ AGM
 - ✓ LIQUID
 - ✓ EASY
 - ✓ NORMAL
 - ✓ BOOST
 - ✓ RECOVERY+ and more
- Pb TRACTION**
- ✓ GEL
 - ✓ LIQUID
 - ✓ EASY
- LITHIUM**
- ✓ LFP/LiFePO₄
 - ✓ LI-ION STD
 - ✓ LFP CELL+
 - ✓ LI-ION CELL+ and more

BSU

(10 CURVE CAPACITY)

- DIAG +
- CHANGE BATTERY
- POWER SUPPLY
- AND MORE
- ✓ TEST
- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR
- ✓ STARTER
- ✓ START

CNT

Connected Modules & Technology p.36



MADE IN FRANCE

MADE IN FRANCE	 50 / 60 Hz			 I max	 25°C @100 %	 40°C @100 %		START MINI	IP		 mm²	 TRACTION BATTERIES	 SHOWROOM CONNECT			 L × W × H cm / kg	
GYSFLASH 103.12 CNT FV	220 > 240 V	1600 W	2.5 m	12 V	230 V : 100 A 110 V : 50 A	230 V : 75 A 110 V : 50 A	230 V : 66 A 110 V : 40 A	20 > 1200 Ah	1 V	21	5 m	16	—	Ø M6	5.8 kg	34,4 × 29.1 × 12 cm	41 × 39 × 22.5 / 9.2
	100 > 127 V	800 W		230 V : 120 A 110 V : 100 A	230 V : 120 A 110 V : 100 A	230 V : 120 A 110 V : 85 A	20 > 1500 Ah	1 V	30	5 m	25	●	Ø M6	6.4 kg	34 × 25.4 × 15 cm	41 × 39 × 22.5 / 11	
GYSFLASH 53.24 CNT FV	220 > 240 V	1600 W	2.5 m	12 V	50 A	230 V : 50 A 110 V : 40 A	230 V : 41 A 110 V : 27 A	10 > 600 Ah	1 V	21	5 m	10	●	Ø M6	5,5 kg	34,4 × 29.1 × 12 cm	41 × 39 × 22.5 / 8.6
	100 > 127 V	800 W		24 V	230 V : 50 A 110 V : 25 A	230 V : 44 A 110 V : 25 A	230 V : 35 A 110 V : 22 A										
GYSFLASH 103.24 CNT FV	220 > 240 V	3200 W	2.5 m	6/12 V	100 A	100 A	230 V : 79 A 110 V : 68 A	20 > 1200 Ah	1 V	30	5 m	25	●	Ø M6	6.4 kg	34 × 25.4 × 15 cm	41 × 39 × 22.5 / 11
	100 > 127 V	1500 W		24 V	230 V : 100 A 110 V : 50 A	230 V : 95 A 110 V : 50 A	230 V : 72 A 110 V : 47 A										



25

GYSFLASH PRO CNT

BATTERY SUPPORT UNITS



GYSFLASH PRO CNT

BSU

BATTERY SUPPORT UNITS

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration

CNT

Connected Technology

FULLY CUSTOMIZABLE
p.34

FV

FLEXIBLE VOLTAGE

85 V 265 V

110 V 230 V

PFC

POWER FACTOR CORRECTION

16 V

COMPATIBLE WITH 16V BATTERIES



19 languages

GB FI
FR TR
DE HR
NL GR
ES CZ
PT PL
HU SK
IT UA
RU
SE
DK



NEW
03 / 2026

6 / 12 / 16 / 24V

12V

GYSFLASH 107.24 CNT FV

100 A

PFC FV CNT 16 V

5 m - 25 mm²
082939



GYSFLASH 157.12 CNT FV

150 A

PFC FV CNT

089969



SC

SMART COOLING TECHNOLOGY


100% DUST PROOF



SILENT



SMART 9 STEP

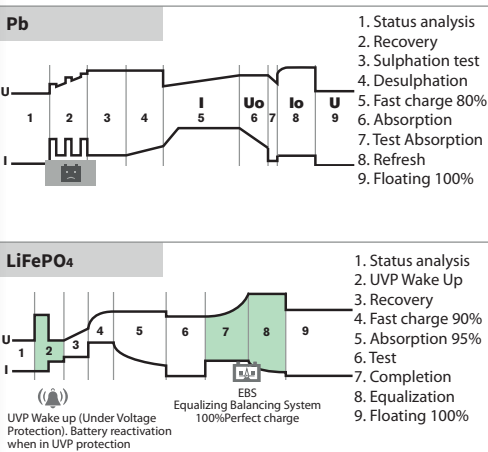

CHARGE

(150 CURVE CAPACITY)

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ NORMAL
- ✓ BOOST
- ✓ RECOVERY+
- ✓ and more

Pb TRACTION

- ✓ GEL
- ✓ LIQUID
- ✓ and more

LITHIUM

- ✓ LFP/LiFePO₄
- ✓ LI-ION STD
- ✓ LFP CELL+
- ✓ LI-ION CELL+
- ✓ and more

BSU

(10 CURVE CAPACITY)

DIAG +




U2 ADJUSTABLE

CHANGE BATTERY



POWER SUPPLY



U2 & I2 max ADJUSTABLE

AND MORE

✓ TEST


- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR

✓ STARTER

✓ START

INCLUDED

Fixing kit



OPTIONS



GYSFLASH PRO vertical wall mounting kit



22 languages

GB NL IT DK HR PL UA CN simplified
FR ES RU FI GR SK CN traditional
DE PT SE TR CZ HU JP



NEW DESIGN
06 / 2026



old design



NEW DESIGN
01 / 2026

6 / 12 / 16 / 24 / 36 / 48V

GYSFLASH 25.48 CNT FV

25 A

PFC SC FV CNT 16 V

5 m - 10 mm²
075962



GYSFLASH 53.48 CNT FV

50 A

PFC FV CNT 16 V

5 m - 10 mm²
025998



CNT

Connected Modules & Technology p.36



MADE IN FRANCE	 50 / 60 Hz			I max	25°C @100 %	40°C @ 100 %		START MINI	IP	 L ↕	 mm²	 TRACTION BATTERIES	 SHOWROOM CONNECT			 L × W × H cm / kg	
GYSFLASH 107.24 CNT FV	220 › 240 V	3200 W	2.5 m	6/12 V	100 A	100 A	230 V : 79 A 110 V : 68 A	20 › 1200 Ah	1 V	30	5 m	25	●	Ø M6	6,4 kg	34 × 25,4 × 15 cm	41 × 39 × 22.5 / 11
	100 › 127 V	1500 W		24 V	230 V : 100 A 110 V : 50 A	230 V : 95 A 110 V : 50 A	230 V : 72 A 110 V : 47 A										
GYSFLASH 157.12 CNT FV	220 › 240 V	2500 W	2.5 m	12 V	230 V : 150 A 110 V : 100 A	230 V : 120 A 110 V : 100 A	230 V : 116 A 110 V : 77 A	20 › 1800 Ah	1 V	40	5 m	25	●	Ø M6	ND	33,4 × 13 × 28 cm	41 × 39 × 22.5 / ND
	100 › 127 V	1500 W															
GYSFLASH 25.48 CNT FV	220 › 240 V	1600 W	2.5 m	6/12/24 V	25 A	230 V : 24 A 110 V : 19 A	230 V : 22 A 110 V : 12 A	10 › 300 Ah	1 V	21	5 m	10	●	Ø M6	5,5 kg	34,4 × 29,1 × 12 cm	41 × 39 × 22.5 / 8.8
	100 › 127 V	800 W		36/48 V	230 V : 25 A 110 V : 12 A	230 V : 24 A 110 V : 12 A	230 V : 20 A 110 V : 10 A										
GYSFLASH 53.48 CNT FV	220 › 240 V	3200 W	2.5 m	6/12/24 V	50 A	50 A	230 V : 41 A 110 V : 28 A	10 › 600 Ah	1 V	30	5 m	10	●	Ø M6	5,9 kg	34 × 25,4 × 15 cm	41 × 39 × 22.5 / 9.5
	100 › 127 V	1500 W		36/48 V	230 V : 50 A 110 V : 25 A	230 V : 48 A 110 V : 26 A	230 V : 37 A 110 V : 20 A										

GYSFLASH PRO CNT

BATTERY SUPPORT UNITS



STARTFLASH

BSU BATTERY SUPPORT UNIT & STARTER

CNT Connected Technology

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration



SPECIAL PROJECTS

Contact us for special projects.

Quick Customization:
Modes, Curves, parameters...

19 languages

GB RU GR
FR SE CZ
DE DK PL
NL FI SK
ES TR UA
PT HR
IT HU

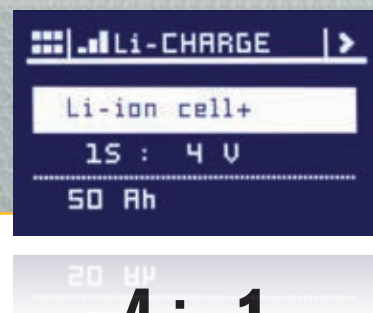

4 in 1

AUTOMATIC CHARGE

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ EXPERT
- ✓ NORMAL
- ✓ BOOST
- ✓ RECOVERY+

Pb TRACTION

- ✓ GEL
- ✓ LIQUID

LITHIUM READY

- ✓ LFP/LiFePO₄
- ✓ LI-ION STD
- ✓ LFP CELL+
- ✓ LI-ION CELL+

BSU

DIAG +



SHOWROOM



CHANGE BATTERY



POWER SUPPLY



AUTOMATIC STARTER

- ✓ START


TEST

- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR


CNT

Connected Technology


SOFTWARE UPDATE

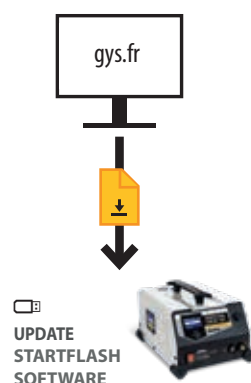

CUSTOMIZATION

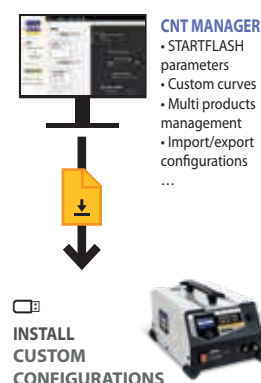






TRACEABILITY

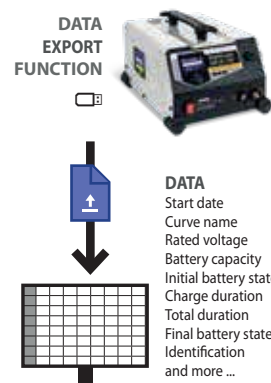

Connected Modules & Technology p.36



SMART 9 STEP

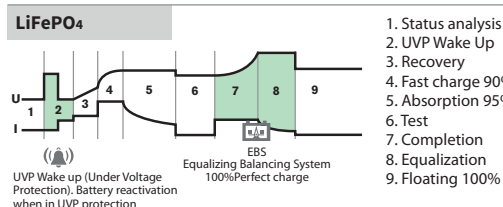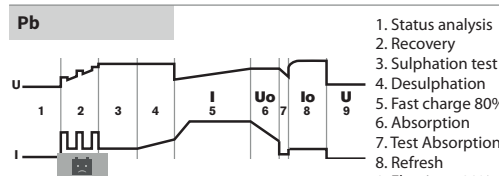

6/12/16/24V


STARTFLASH 120.24 CNT

2, 300 A

5 m - 25 mm² 700 A
073616

OPTION

Trolley
074965 510,00 €HT

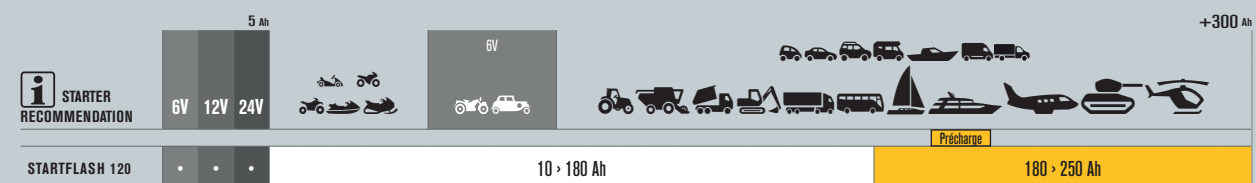

MADE IN FRANCE	 50 / 60 Hz	CHARGE 							START 			IP	 LxWxH cm / kg	 LxWxH cm / kg		
				START MINI	I max	25°C @ 100 %	40°C @ 100 %		TRACTION BATTERIES		1V/C				0V/C	AUTO START
STARTFLASH 120.24 CNT	85 > 265 V	6/12/24V	3500 W	2 V	110 V : 100 A	75 A	55 A	20 > 1200Ah	●	6/12/24 V	150 A	150 A	●	20	49 x 37.5 x 30.5 / 14	41.5 x 32.5 x 25.5 / 18.5
					230 V : 120 A	110 A	90 A			6 V :	300 A	300 A				
										12 V :	300 A	300 A				
										24 V :	200 A	300 A				





BSU

BATTERY
SUPPORT UNITSCNT
Connected
TechnologyYouTube
VIDEO
EQUALIZE MODEBROCHURE
BATTERY
BALANCING

EQUALIZE MODE

REBALANCE YOUR BATTERY PACK

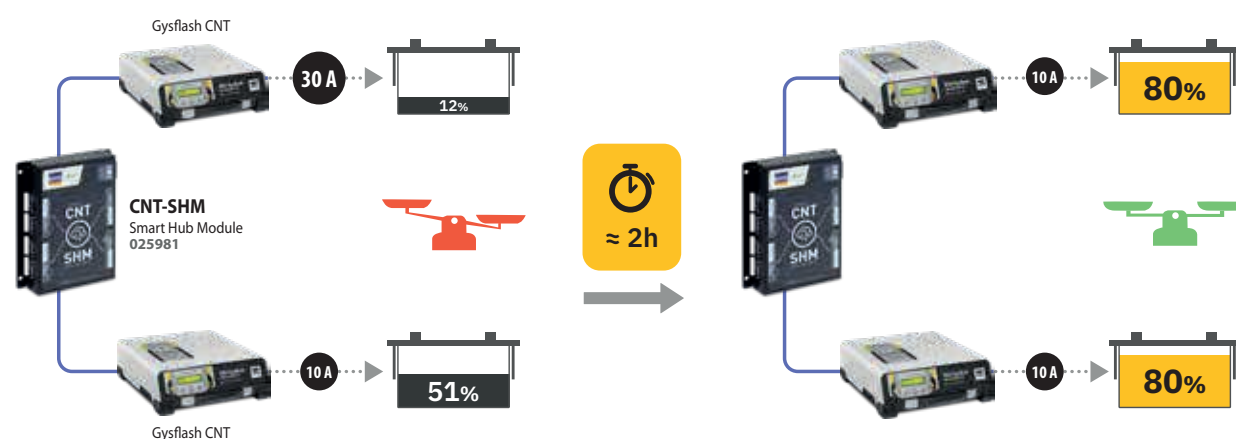

BENEFITS

Increased
reliabilityHealthy
batteriesWaste
reduction

EQUALIZATION & BSU

Use all your BSU modes while balancing the batteries

DIAG +



SHOWROOM



CHANGE BATTERY




POWER SUPPLY




AND MORE

SMART 9 STEP CHARGE

Pb

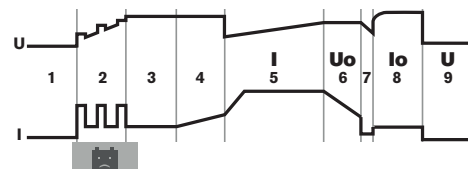

1. Status analysis
2. Recovery
3. Sulphation test
4. Desulphation
5. Fast charge 80%
6. Absorption
7. Test Absorption
8. Refresh
9. Floating 100%

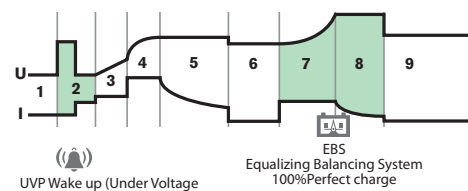LiFePO₄

UVP Wake up (Under Voltage Protection). Battery reactivation when in UVP protection

EBS
Equalizing Balancing System
100% Perfect charge

1. Status analysis
2. UVP Wake Up
3. Recovery
4. Fast charge 90%
5. Absorption 95%
6. Test
7. Completion
8. Equalization
9. Floating 100%

GYSFLASH EQUALIZE PACKS



NEW

EQUALIZE (2 × 12 V CHARGERS)



Gysflash 101.12 CNT FV

026988

12 V



Gysflash 101.12 CNT FV

026988

12 V



CNT SHM

025981



SMC Cable (1m)

056596



BSU Flash Plus

085510

pack EQUALIZE 1
085534 2 229,50 €HTpack EQUALIZE 2
085541 2 674,50 €HT

EQUALIZE (2 × 24 V CHARGERS)



Gysflash 101.24 CNT FV

025967

24 V



Gysflash 101.24 CNT FV

025967

24 V



CNT SHM

025981



SMC Cable (1m)

056596



BSU Flash Plus

085510

pack EQUALIZE 3
085558 2 739,50 €HTpack EQUALIZE 4
085565 3 184,50 €HT

CNT

Connected
Modules
& Accessories
p.36



BSU BATTERY SUPPORT UNITS

CNT
Connected
Technology

FULLY
CUSTOMIZABLE
p.34




YouTube
PLAYLIST
CNT TECHNOLOGY

19 languages


GB ES RU TR PL
FR PT SE HR SK
DE HU DK GR UA
NL IT FI CZ

SPECIAL PROJECT
- CONTACT US


AUTOMATIC BATTERY DETECTION & MODE SELECTION

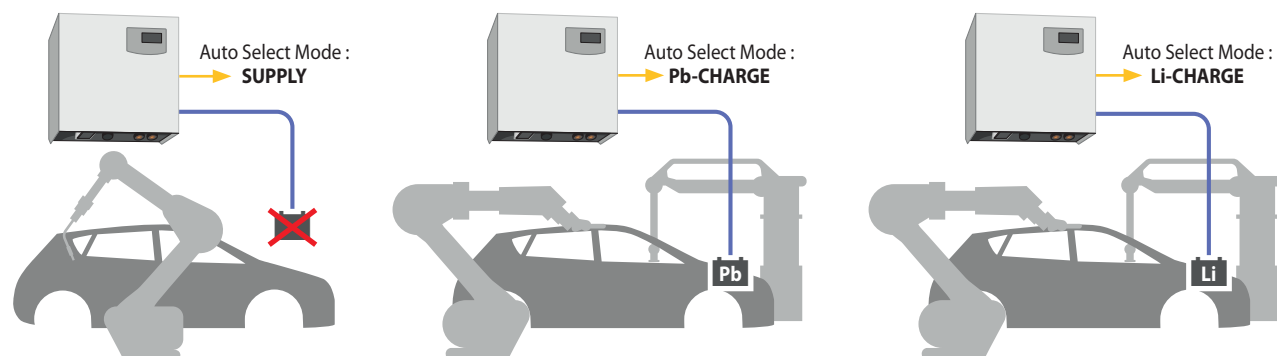

CONTROL VIA 1D/2D BARCODES

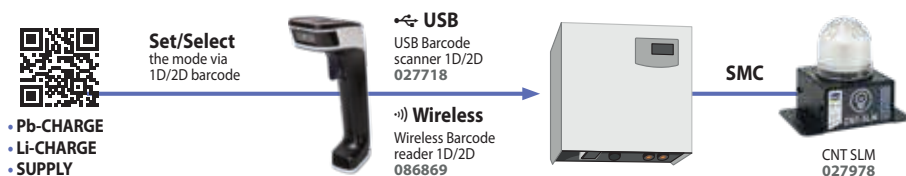

ADVANCED AUTOMATION

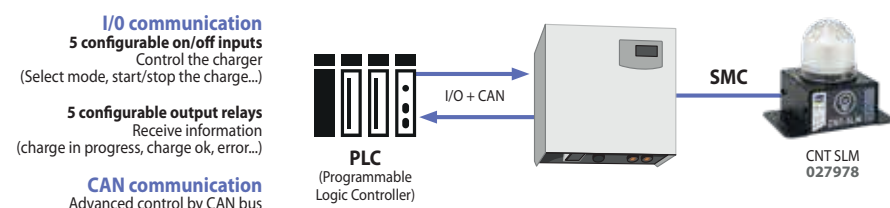

CHARGE (150 CURVE CAPACITY)

Pb CHARGE
✓ LEAD ACID
✓ and more

Li CHARGE
✓ LITHIUM
✓ and more


SUPPLY (10 CURVE CAPACITY)

EPS (External Power Supply)
✓ and more

POWER-UP

**LITHIUM
REACTIVATION MODE**

CAR MANUFACTURING

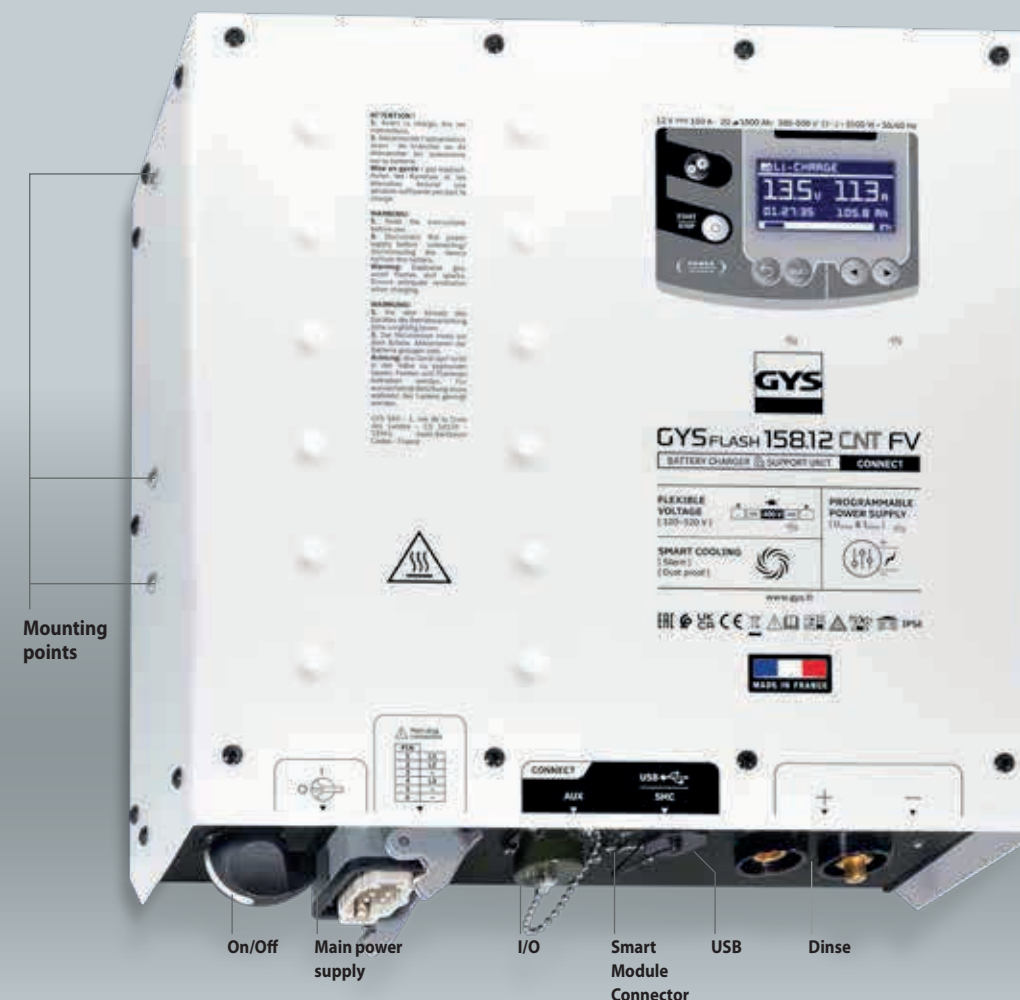

ACCESSORIES p.39

SCREW CONNECTOR
available on request

CONFIG DESIGNER MENU


Setting the charge curve from the
Gysflash interface :

lead-acid	n°001
U_esp	11.5 V
U_lade	14.8 V
I_lade	150.0 A
I_ehl	2.5 A
T_min	00:05:00
T_max	65:00:00
Q_max	250 Ah
T/Q_max error	EHL
U_ehl	13.2 V
T_res	250:00:00
U_low	5.0 V

SECURE ACCESS

• Customizable
manual accesses
• Configurable
password

12 V




GYSFLASH 108.12 CNT FV

105 A 1~

PFC SC FV CNT

no accessories
085602




GYSFLASH 148.12 CNT FV

145 A 1~

PFC SC FV CNT

no accessories
069916

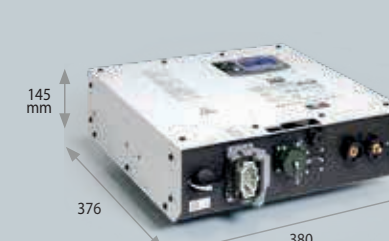

GYSFLASH 158.12 CNT FV

150 A 3~

SC FV CNT

no accessories
069909


MADE IN FRANCE	 50 / 60 Hz				25°C @100 %	40°C @ 100 %	60°C @ 100 %		START MINI	IP			
GYSFLASH 108.12 CNT FV	220 ÷ 240V	1800 W	2.5 m	12 V	230 V : 105 A 110 V : 65 A	230 V : 105 A 110 V : 65 A	230 V : 105 A 110 V : 65 A	230 V : 88 A 110 V : 62 A	20 ÷ 1200 Ah	1 V	54	9.4 kg	37.6 × 14.5 × 29.6 cm
	100 ÷ 127V	1000 W			230 V : 145 A 110 V : 100 A	230 V : 134 A 110 V : 100 A	230 V : 116 A 110 V : 90 A	230 V : 88 A 110 V : 62 A	20 ÷ 1800 Ah	1 V	54	9.4 kg	37.6 × 14.5 × 29.6 cm
GYSFLASH 148.12 CNT FV	220 ÷ 240V	2500 W	2.5 m	12 V	230 V : 145 A 110 V : 100 A	230 V : 134 A 110 V : 100 A	230 V : 116 A 110 V : 90 A	230 V : 88 A 110 V : 62 A	20 ÷ 1800 Ah	1 V	54	9.4 kg	37.6 × 14.5 × 29.6 cm
	100 ÷ 127V	1500 W			230 V : 145 A 110 V : 100 A	230 V : 134 A 110 V : 100 A	230 V : 116 A 110 V : 90 A	230 V : 88 A 110 V : 62 A	20 ÷ 1800 Ah	1 V	54	9.4 kg	37.6 × 14.5 × 29.6 cm
GYSFLASH 158.12 CNT FV	380 ÷ 500V	2500 W	-	12 V	150 A	140 A	120 A	100 A	20 ÷ 1800 Ah	1 V	54	10.3 kg	37.6 × 14.5 × 38 cm



BSU

BATTERY SUPPORT UNITS

CNT
Connected
Technology

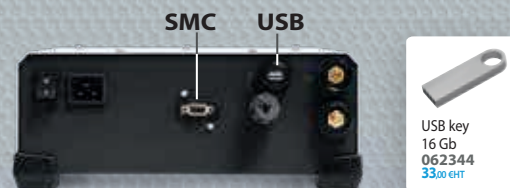

SOFTWARE UPDATE

LIFETIME EVOLUTIONS



TRACEABILITY

CHARGING DATA



DESIGN YOUR CHARGING CURVE

PRODUCT CONFIGURATIONS


CNT MANAGER (gys.fr)

- GYSFLASH parameters
- Custom curves
- Multi-unit management
- Import/export configurations
- ...



Full customisation

Create your personalised configuration

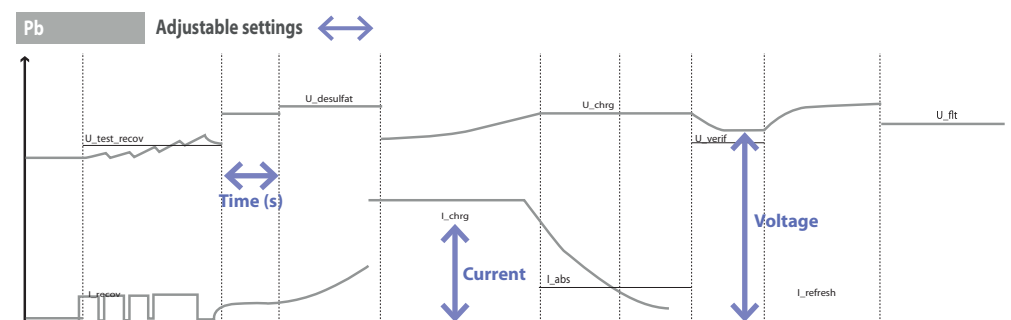

Adjust your unit to best suit your application

	LEAD-ACID - PB	Lithium - LFP	Lithium - Li-ion std
CELL VOLTAGE (20% - 100%)	2.0 V/cell – 2.15 V/cell	3.2 V/cell – 3.6 V/cell	3.5 V/cell – 4.2 V/cell
CHARGING VOLTAGE	2.33 V/cell – 2.47 V/cell	3.6 V/cell	4.2 V/cell
Gysflash xx.12 CNT	1 S* – 6 S	1 S – 4 S	1 S – 3 S
Gysflash xx.24 CNT	1 S – 12 S	1 S – 8 S	1 S – 7 S
Gysflash xx.48 CNT	1 S – 24 S	1 S – 16 S	1 S – 14 S

*S = Battery serial cells

Download one of our GYS configurations

Configuration file (gys.fr)	Applications	CHARGE MODE												POWER MODE						MISCELLANEOUS		
		Pb-CHARGE						Li-CHARGE				TRACTION		SHOWROOM	DIAG+	CHANGE BAT.	STARTER MODE	POWER SUPPLY	LI-SUPPLY/LFP	LI-SUPPLY/LI-ion	TESTER MODE	
		normal	AGM	liquid	Easy	Boost	Recovery + Ca / a recov	LFP /LiFePO4	Li-ion std	LFP cell+	Li-ion cell+	liquid	gel									
1_gys_original.gfc	Initial configuration of the charger	✓	✓	✓	✓			✓						✓	✓							✓
2_car_extended.gfc	Extensive features for garages	✓	✓	✓	✓	✓		✓						✓	✓	✓	✓	✓				✓
3_showroom_only.gfc	Simplified version for dealerships and demonstration vehicles													✓								
4_pro_lithium.gfc	Professional of lithium battery							✓	✓	✓	✓							✓	✓	✓		
5_traction.gfc	Forklift truck, electric pallet truck, stacker...											✓	✓									
6_full_version.gfc	Full version	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



YouTube
PLAYLIST
CNT TECHNOLOGY



Contact us for special projects.

Quick Customization:
Modes, Curves, parameters...

MODULES

MAXIMUM VERSATILITY

SINGLE MODULE




MULTI-MODULE



ADVANCED




MULTI-MODULE GROUPS

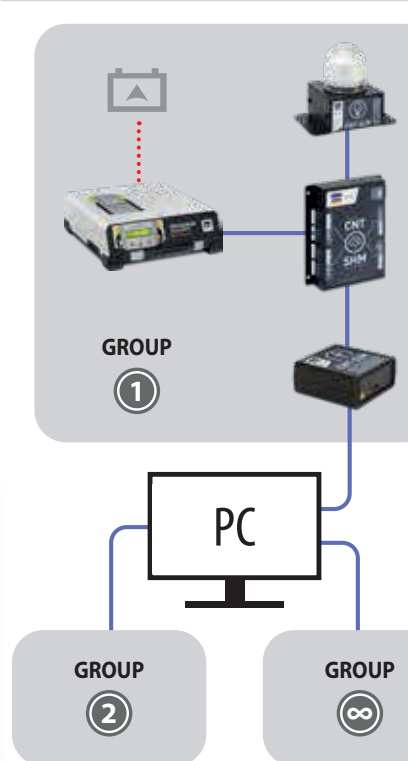

PARALLEL CHARGING

EXAMPLE : GYSFLASH 101.12 CNT (X4)

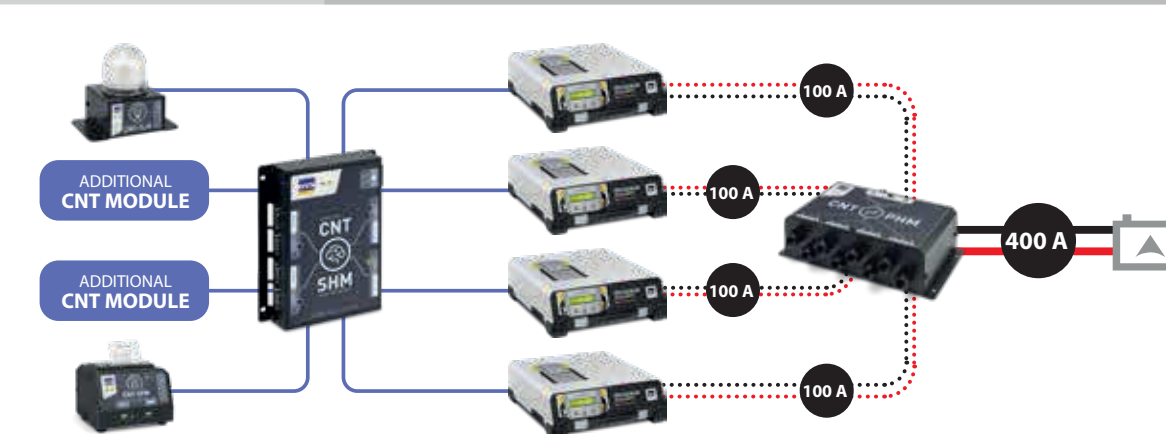

PORTABLE BSU



Portable
BSU

USAGE DURATION Power pack + Gysflash	GYSFLASH			
	30.12 30.24	50.12 51.12	100.12 / 102.12 101.12 / 103.12 50.24 / 53.24 25.48	121.12 123.12 125.12
POWER PACK 520	1 h 10	—	—	—
POWER PACK 14.22	3 h 10	1 h 50	1 h	45 min
POWER PACK 14.15 FC	3 h 10	1 h 50	1 h	—





CNT TECHNOLOGY MODULES

CNT Connected Technology

SMC CABLE


1 m
056596
11,30 € HT

3 m
025691
14,00 € HT



YouTube
PLAYLIST
CNT TECHNOLOGY

COMING SOON



SCAN

CRIT'AIR



Customer data



Battery data



Charge data



USB Barcode scanner

1D/2D

027718



USB direct connection



Wireless Barcode reader

1D/2D

086869



Wireless



Download Brochure
Télécharger la brochure



OPTIONS

Barcode scanner support
025745 20,00 € HT



LIGHT & SOUND



Scratch mounted


CNT-SLM Smart Light Module

027978

↓ 12,6 × 14,6 × 9,3 cm / 560g
↑ 23 × 17 × 13 cm / 840g



65dB



Pb charge Lithium charge OK Error

Included
SMC Cable - 1 m
056596 11,30 € HT



OPTIONS

SLM/SPM support
028906 27,00 € HT



PRINT



Magnetic mounting

CNT-SPM Smart Printer Module

026919

↓ 14 × 10,5 × 13,3 cm / 1,4 kg
↑ 23 × 17 × 13 cm / 1,9 kg



Customizable receipt


Included
SMC Cable - 1 m
056596 11,30 € HT



Standard roller x2
57mm x 7,5 m, Ø 25 mm
056633 3,20 € HT

OPTIONS

SLM/SPM support
028906 27,00 € HT



USB Keyboard

AZERTY 027725 36,00 € HT
QWERTY 027770 37,00 € HT

QWERTY compatibility

BSU SMART COMMUNICATION




CNT-SUM Smart USB Module

025974

USB micro A

↓ 6,9 × 6,8 × 2,9 cm / 85g
↑ 28,5 × 11 × 11,5 cm / 380g


Computer /
Diag System



Included
SMC Cable - 1 m
056596 11,30 € HT



Computer connection




CNT-SWM Smart Wireless Module

070837

Bluetooth LE Wifi

↓ 6,9 × 6,8 × 2,9 cm / 85g
↑ 27,6 × 9,6 × 9,6 cm / 440g

Computer /
Diag System



Included
SMC Cable - 1 m
056596 11,30 € HT



SMART HUB MODULE



CNT-SHM Smart Hub Module


025981

↓ 22 × 18 × 4,5 cm / 1 kg
↑ 16,4 × 13,4 × 24 cm / 1,7 kg

Included
SMC Cable
1 m
056596 11,30 € HT



UP TO 4 MODULES + 4 GYSFLASH

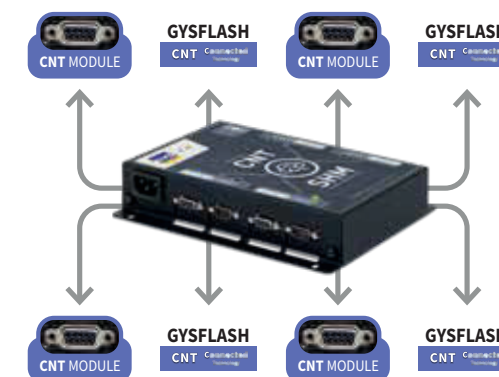

POWER HUB MODULE



CNT-PHM Power Hub Module


056589

↓ 31,7 × 24,5 × 9 cm / 2,7 kg
↑ 32 × 29 × 13,5 cm / 3,2 kg

Included
M6 KIT



4 GYSFLASH IN Ø Cables: 10 → 25 mm²

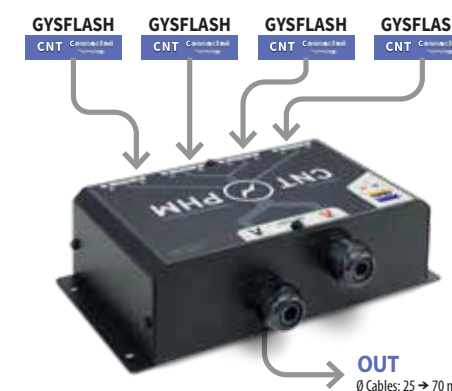

OUT
Ø Cables: 25 → 70 mm²



SUPPORTS



BSU Flash XL
028890 410,00 € HT



ALL GYSFLASH
- COMPATIBILITY -
Vertical & Horizontal


TROLLEYS

BSU Flash XL
028890 410,00 € HT

BSU Flash Plus
085510 445,00 € HT

OPTION
Protective cover
062733 155,00 € HT

OPTION
Cable support
052284 100,00 € HT

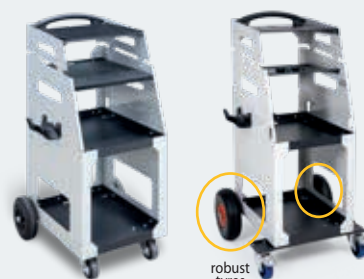

robust
tyres



Battery charging rack
Rack de charge
Ladeständer
079595 510,00 € HT




Heavy-duty case
Valise de chantier
Hartschalenkoffer
060432 159,00 € HT



WALL SUPPORT

Magnetfix 50
029637 105,00 € HT

✓ for vertical Gysflash



GYSFLASH PRO vertical wall
mounting kit
082694 27,00 € HT

✓ for vertical Gysflash



Wall support
Tablette
Wandhalterung
055513 70,00 € HT

└ 21 x 43 x 57 cm / 3.9 kg
└ 36 x 43 x 20 cm / 3.3 kg

✓ for horizontal Gysflash



STANDARD ACCESSORIES

ANDERSON CABLES	for GYSFLASH	
	32.12 PL / 30.12 / 50.12 51.12 / 30.24 / 50.24 / 53.24 25.48 / 51.48 / 53.48	100.12 / 101.12 102.12 / 103.12
Anderson / Clamps		
2.5 m - 10 mm ² 085800 59,00 € HT	✓	—
2.5 m - 16 mm ² 056503 85,00 € HT	✓	✓
5 m - 16 mm ² 054615 123,00 € HT	✓	✓
8 m - 16 mm ² 056572 161,00 € HT	✓	✓
Anderson / NATO 	✓	✓
5 m - 16 mm ² 026810 279,00 € HT	✓	✓
Anderson / Rema 160 A	✓	✓
5 m - 16 mm ² 069091 189,00 € HT	✓	✓
Anderson / Anderson 175 A	✓	✓
5 m - 16 mm ² 069107 128,00 € HT	✓	✓
Anderson / Texas	✓	✓
0.2 m - 16 mm ² 055902 27,50 € HT	✓	✓
1 m - 16 mm ² 028791 55,00 € HT	✓	✓

TEXAS CABLES	for GYSFLASH	
	121.12 / 123.12 / 125.12 108.12 / 148.12 / 158.12 101.24 / 103.24 / 107.24	
Texas / Clamps		
2.5 m - 25 mm ² 028876 120,00 € HT	✓	
5 m - 25 mm ² 027886 173,00 € HT	✓	
Texas / Rema 160 A	✓	
5 m - 25 mm ² 025714 229,00 € HT	✓	
Texas / Anderson 175 A	✓	
5 m - 25 mm ² 025721 193,00 € HT	✓	
Texas / NATO 	✓	
5 m - 25 mm ² 025707 306,00 € HT	✓	
10 m - 25 mm ² 056626 499,00 € HT	✓	

PARALLEL CABLES KIT 072954				
=	+	+	+	+
				
Anderson/Cable lugs M6 x2 16 mm ² - 1 m	Cable lugs/Cable lugs M6 x2 (1 red + 1 black) 35 mm ² - 5 m	Texas/Cable lugs M6 x2 25 mm ² 1 m	M6 KIT Ø16 (x4) Ø25 (x4) Ø35 (x4)	SMC Cable 1 m

INTERNAL FUSES
 x2 40 A for GYSFLASH 30 054646 10,20 € HT
 x2 125 A for GYSFLASH 100, 101, 102 054585 7,50 € HT
 x2 150 A for GYSFLASH 121, 123, 103 027930 4,10 € HT

EXTERNAL FUSES
 x5 6.3 A for GYSFLASH 30 054578 4,00 € HT
 x5 10 A for GYSFLASH 40, 50 100, 101, 102 056527 4,00 € HT
CONNECTORS
 NATO 026780 99,00 € HT
 USB key 16 Go/GB 062344 33,00 € HT

GYSFLASH CNT PACKS

	101.12 CNT 026988	121.12 CNT 026971	CNT-SPM + paper roll + support 026919 + 056633 + 028906	Barcode Scanner + support 027718 + 025745	BSU Flash XL 028890	CNT SLM 027978	CNT SHM 025981	CNT PHM 056589	Parallel cable kit 072954
SINGLE GYSFLASH									
pack GYSFLASH CNT 1 068117	✓	—	✓	✓	✓ QWERTY	✓	—	—	—
pack GYSFLASH CNT 2 068124	✓	—	✓	✓	✓ AZERTY	✓	—	—	—
pack GYSFLASH CNT 3 068131	—	✓	✓	✓	✓ QWERTY	✓	—	—	—
pack GYSFLASH CNT 4 068148	—	✓	✓	✓	✓ AZERTY	✓	—	—	—
DOUBLE GYSFLASH									
pack GYSFLASH CNT 5 072978	✓ x2	—	✓	✓	✓ AZERTY	✓	✓	✓	✓
pack GYSFLASH CNT 6 074972	✓ x2	—	✓	✓	✓ QWERTY	✓	✓	✓	✓
WITHOUT GYSFLASH									
pack Parallel Charging 072961	—	—	—	—	—	—	—	✓	✓
pack GYSFLASH PRO 1 079908 1400,20 € HT	—	—	✓	✓	✓ AZERTY	✓	✓	—	—
pack GYSFLASH PRO 2 079915 1401,20 € HT	—	—	✓	✓	✓ QWERTY	✓	✓	—	—



CHARGERS

SSM

Save and load settings.
Automatic restart in case of power cut.

Mémorisation des réglages.
Redémarrage automatique en cas de coupure électrique.

Einstellungsspeicherung.
Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :
Compatible with Start/Stop vehicles.
Compatible véhicules Start/Stop.
Geeignet für START-STOP-Fahrzeuge.

Cold charge

"Cold charge" mode:
performance-enhancing charging mode for cold or freezing weather conditions.

Mode "Cold charge":
optimisation des performances en cas de temps froid ou de gel.

-Cold Charge--Modus:
Leistungsoptimierung bei kaltem Wetter oder bei Frost.

INCLUDED



MADE IN CHINA

MADE IN GYS CHINA

ARTIC

IP 65

WATER PROTECTION
ARTIC 1500, 4000 & 8000

CHARGERS ONLY



AUTOMATIC SMART HF INVERTER

REGULATED
100V
FAST CHARGE

ARTIC 800

12V 0.8A GO > 7 V

SSM

029569 27,00 €HT
029682



ARTIC 1500

12V 1.5A GO > 7 V

SSM

029576 34,50 €HT



ARTIC 4000

6/12V 4/1-4A GO > 2 V (6V)
GO > 7 V (12V)

SSM START STOP Cold charge

029583 57,50 €HT
029705



ARTIC 8000

2/8A 12V GO > 7 V

SSM START STOP Cold charge

029590 93,00 €HT
029712



ENERGY

PATENTS REGISTERED NUMBERS
001652090-0001
EUROPEAN TRADEMARK & DESIGN

old design



NEW DESIGN
02/2026



TCB

PATENTS REGISTERED NUMBERS
001652090-0001
EUROPEAN TRADEMARK & DESIGN

old design



NEW DESIGN
02/2026



2 IN 1

CHARGE



TEST

12V • TRADITIONAL

W

12V • AUTOMATIC

WU

ENERGY 126

4A

SSM

023222 59,60 €HT
025165



TCB 60

2/4A GO > 3.5 V

SSM START STOP

023253 78,70 €HT



TCB 90

2/5.5A GO > 3.5 V

SSM START STOP

023260 91,00 €HT



TCB 120

3.5/7A GO > 3.5 V

SSM START STOP

023284 95,00 €HT
025240



Fuse X10
10A 054530 4,00 €HT
15A 054493 4,00 €HT

RECOMMENDATION	5 Ah			10 Ah			15 Ah			20 Ah			6V			40 Ah			80 Ah			90 Ah			110 Ah			120 Ah			180 Ah			240 Ah			300 Ah			+ Ah		
	6V	12V	24V																																							
Maintenance																																										
ARTIC 800																																										
ARTIC 1500																																										
ARTIC 4000																																										
ARTIC 8000																																										
ARTIC 8000																																										
ENERGY 126																																										
TCB 60 automatic																																										
TCB 90 automatic																																										
TCB 120 automatic																																										



CT

CHARGERS



CT 160

9 A

1.5 m - 1.5 mm² → 40 A
024106 109,00 € HT
025325

CT 210

12 A

1.5 m - 2.5 mm² → 40 A
024113 134,00 € HT
025349

12/24 V • MANUAL W

CA

Protection for
on-board electronics

CA 150

10 A

1.5 m - 2.5 mm² → 40 A
024434 179,00 € HT

CA 360

25 A

2 m - 6 mm² → 60 A
023185 348,00 € HT

12/24 V • AUTOMATIC W2

MULTICHARGE

6 charging
speeds

MULTICHARGE CT 48

32 A



026087 438,00 € HT

12/24/36/48 V • MANUAL W

Fuse
x1010A
WATTMATIC 100
054530 4,00 € HT15A
CT 160,
WATTMATIC 140
054493 4,00 € HT20A
CT 210,
WATTMATIC 150 & 170
054509 4,00 € HT25A
CA 150,
WATTMATIC 180
054516 4,00 € HT40A
CT 48
054646 10,20 € HT50A
CA 360
054622 5,40 € HT

WATTMATIC

Protection for
on-board
electronics

WATTMATIC 100

5 A



024823 117,00 € HT

60 > 3.5 V

1.5 m - 1.5 mm² → 40 A

WATTMATIC 170

10 A



025615 145,00 € HT

60 > 3.5 V

1.8 m - 2.5 mm² → 40 A

6/12 V • AUTOMATIC WUoU

			CHARGE 									
				Average / Moyen (EN 60335)			Efficace / RMS					
				Reg 1	Reg 2	Reg 3						
CT 160	230V, 50 / 60 Hz	190 W	12 / 24 V	12V > 24V >	7 A 3 A	9 A (boost) 5 A (boost)	—	13,5 A 7,5 A	2 2	15 A	30.3 × 20.7 × 13.9 / 3.9	3,9 kg
CT 210	230V, 50 / 60 Hz	260 W		12 / 24 V	12V > 24V >	8 A 4 A	12 A (boost) 6 A (boost)	—	18 A 9 A	2 2	20 A	33.4 × 22.5 × 14.4 / 5.3
MULTICHARGE CT 48	230V, 50 / 60 Hz	1200 W	12 / 24 / 36 / 48 V		12V > 24V > 36V > 48V >	20,8 A > 32,4 A 20,1 A > 31,8 A 19,6 A > 22,4 A (30,4 A boost) 15,5 A > 18,7 A (24,3 A boost)			31 A 29 A 29 A 28 A	6 6 6 6	40 A	40.5 × 34 × 24 / 15.8
CA 150	230V, 50 / 60 Hz	500 W	12 / 24 V		8 A	10 A (boost)	—	18 A	2	25 A	32.8 × 25.5 × 14.6 / 6.5	6 kg
CA 360	230V, 50 / 60 Hz	920 W	12 / 24 V		7 A	15 A (boost1)	25 A (boost2)	37 A	3	50 A	43 × 30 × 23 / 14	14 kg
WATTMATIC 100	230V, 50 Hz	170 W	6 / 12 V		3 A	5 A		11.4 A	2	10 A	26.9 × 24.3 × 12.8 / 3.7	3.8 kg
WATTMATIC 170	230V, 50 Hz	280 W	6 / 12 V		6.5 A	10 A (boost)	—	18.8 A	2	20 A	33.9 × 22.2 × 13.6 / 5	5 kg

RECOMMENDATION	5 Ah 10 Ah 15 Ah 20 Ah 40 Ah 80 Ah 90 Ah 110 Ah 120 Ah 180 Ah 240 Ah 300 Ah + Ah																
	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V
CT 160		•	•														
CT 210		•	•														
MULTICHARGE CT 48		•	•	+48 V													
CA 150		•	•														
CA 360		•	•														
WATTMATIC 100	•	•															
WATTMATIC 170	•	•															



BATIUM



SELF START MEMORY



AUTO DETECT

BATTERY VOLTAGE DETECTION



ALL BATTERIES

CHARGERS

AUTOMATIC, SMART & FAST



Old design



Microprocessor Control



On-board electronics



Reverse polarity



Over voltage



No sparks



YouTube

PLAYLIST BATIUM



NEW DESIGN
12 / 2025



NEW DESIGN
02 / 2026

BATIUM 7.12

7 A

GO > 0.5 V

SSM START STOP V AUTO DETECT

1.5 m - 1.5 mm² → 40 A

024496 135,00 € HT

024557



BATIUM 15.12

15 A

GO > 0.5V

SSM START STOP V AUTO DETECT

SOS RECOVERY MODE

1.5 m - 2.5 mm² → 40 A

024519 172,00 € HT

024632



6 / 12 V IUWoU



NEW DESIGN
11 / 2025



NEW DESIGN
12 / 2025

BATIUM 7.24

7 A

GO > 0.5 V

SSM START STOP V AUTO DETECT

1.5 m - 1.5 mm² → 40 A

024502 148,00 € HT



BATIUM 15.24

15 A

GO > 0.5V

SSM START STOP V AUTO DETECT

SOS RECOVERY MODE

1.5 m - 2.5 mm² → 40 A

024526 216,00 € HT

024588




6 / 12 / 24 V IUWoU



REGULATED FAST CHARGE



I REGULATED I UoU FAST CHARGE




ex. Battery 12V



TRACTION BATTERY CHARGING




I Ulo



ex. Battery 12V



TEST



NEW DESIGN
03 / 2026

BATIUM 25.24 X

25 A

GO > 0.5V

SSM START STOP V AUTO DETECT

SOS RECOVERY MODE

2 m - 6 mm² → 60 A

024830 561,00 € HT

6 / 12 / 24 V



I Ulo

Specific charge
Traction batteries



Fuse
x10

15A
BATIUM 7/12 & 7/24
054493 4,00 € HT

30A
BATIUM 15/12 & 15/24
054523 4,00 € HT

i RECOMMENDATION

	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah

BATIUM 7.12	•	•														
BATIUM 7.24	•	•	•													
BATIUM 15.12	•	•														
BATIUM 15.24	•	•	•													
BATIUM 25.24 X	•	•	•													

MADE IN FRANCE	 50 / 60 Hz		CHARGE 							 Fuse	 L × W × H cm / kg		 SOS RECOVERY MODE
				 Rec	RMS / Efficace	Average / Moyen (EN 60335)							
						Reg 1	Reg 2	Reg 3	boost				
BATIUM 7.12	230V	105 W	6/12 V	2	11 A	3 A	—	—	7 A	15 A	13.5 × 36 × 21 / 4.6	4.6 kg	—
BATIUM 15.12	230V	225 W	6/12 V	3	22 A	7 A	10 A	—	15 A	30 A	36.2 × 21.2 × 14 / 5.7	5.6 kg	●
BATIUM 7.24	230V	210 W	6/12/24 V	2	11 A	3 A	—	—	7 A	15 A	34.8 × 21 × 14.1 / 5.4	5.4 kg	—
BATIUM 15.24	230V	450 W	6/12/24 V	3	22 A	7 A	10 A	—	15 A	30 A	36.2 × 21 x 14.3 / 7.1	7.1 kg	●
BATIUM 25.24X	230V	1150 W	6/12/24 V	3	37 A	7 A	15 A	25 A	—	—	42 × 28 × 24.5 / 13.5	13.4 kg	●



45

BATIUM

CHARGERS



 **STARTUP**

CHARGERS & STARTERS
AUTOMATIC **W2**

 **SELF START MEMORY**



3 in 1

CHARGE

+

TEST

+

START

 **START / NEOSTART**

CHARGERS & STARTERS
TRADITIONAL **W**

 **SELF START MEMORY**



Fuse x2



50 A
Start 200
054622 5,00 €HT



150 A
Neostart 320
054639 7,00 €HT



80 A
Start 300
054653 6,00 €HT



200 A
Neostart 420, 620
054547 6,00 €HT



CHARGERS & STARTERS

12 - 24 V

TRADITIONAL

START	48
NEOSTART	49

AUTOMATIC

STARTIUM	50
----------	----

BATTERY SUPPORT UNIT

DIAG-STARTIUM	51
---------------	----

12 V

STARTUP 80
17 A

 **SELF START MEMORY**

1,5 m - 2,5 mm² ➔ 30 A

024922 **132,00 €HT**

🇫🇷 : 025127



12V | 12/24 V

START 200
18 A

 **SELF START MEMORY**

1,5 m - 6 mm² ➔ 60 A

025530 **207,00 €HT**



START 300
23 A

 **SELF START MEMORY**

2 m - 10 mm² ➔ 220 A

025547 **313,00 €HT**



NEOSTART 320
9 / 40 A

 **SELF START MEMORY**

2 m - 10 mm² ➔ 220 A

025301 **370,00 €HT**



12/24 V

NEOSTART 420
40 A

 **SELF START MEMORY**

1,8 m - 10 mm² ➔ 500 A

025295 **469,00 €HT**



NEOSTART 620
60 A

 **SELF START MEMORY**

1,8 m - 16 mm² ➔ 500 A

025288 **522,00 €HT**

🇫🇷 : 025486



DESIGN GYS FRANCE MADE IN GYS CHINA				CHARGE 									START 					
	50 / 60 Hz			CHARGE kW	START kW		RMS / Efficace	Average / Moyen (EN 60335)	Boost	Automatic	Manual	 min > max	1 V/C	0 V/C	Fuse			
START UP 80	230V	13 A	12V	0,35	1	2	13, -25 A	9 A	17 A	•	—	40 > 170 Ah	50 A	80 A	—	17 x 11.5 x 31 / 4	19 x 12 x 32 / 4,2	
START 200	230V	13 A	12V	0,39	1,4	3	15-25 A	11 A	18 A	—	•	53 > 240 Ah	80 A	120 A	50 A	35 x 24 x 15 / 7,6	37 x 27 x 18 / 8	
START 300	230V	13 A	12V	0,8	3,6	3	13-36 A	10 A	23 A	—	•	42 > 300 Ah	100 A	165 A	80 A	36 x 27 x 20 / 12,4	40 x 35 x 23,5 / 13,7	
		13 A	24V	1,2	3,6			8 A	17 A			38 > 224 Ah				41 x 35 x 21 / 13	41 x 35 x 24 / 14,7	
NEOSTART 320	230V	13 A	12 / 24V	0,8	6,5	3	40 A	10 A 9 A	40 A 30 A	—	•	20 > 700 Ah	160 A	270 A	150 A	41 x 30 x 21 / 13	41 x 35 x 24 / 14,7	
NEOSTART 420	230V	16 A	12 / 24V	1,7	9	3	70 A	20 A	40 A	—	•	20 > 1000 Ah	250 A	420 A	200 A	48 x 30 x 23 / 18	52 x 34 x 31 / 21	
NEOSTART 620	230V	16 A	12 / 24V	2	10	3	90 A	30 A	60 A	—	•	20 > 1350 Ah	330 A	620 A	200 A	31.5 x 23 x 44.5 / 23,7	21 x 33.5 x 26.5 / 24	

i Recommendation	5 Ah		10 Ah		15 Ah		20 Ah		40 Ah		80 Ah		90 Ah		110 Ah		120 Ah		180 Ah		240 Ah	
	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V	12V	24V	6V
START UP 80	•	•	•																			
START 200		•	•																			
START 300		•	•																			
NEOSTART 320		•	•																			
NEOSTART 420		•	•																			
NEOSTART 620		•	•																			

CHARGERS & STARTERS

AUTOMATIC



3 in 1

 **AUTOMATIC CHARGE**
= BATTUM

 **AUTOMATIC START**

 **TEST ALTERNATOR**

 **TIMER**

 **UNIVERSAL MODE**

 **SULFATED BATTERIES**

 **ALL BATTERIES**

 **>1V**

 **FULL PROTECTION**

 On-board electronics

 Over voltage

 No sparks





35/50 mm²

CHARGERS & STARTERS

AUTOMATIC & BSU

BATTERY SUPPORT UNIT

BSU Battery Support Unit

POWER SUPPLY
DIAG+ 60A
Voltage adjustable 12 V • 15 V

 **BATTERY EXPERT**







Compatibility
p.63

12/24 V

12V


6/12/24 V

STARTIUM 330E
25 A
1,9 m - 10 mm² ➤ 500 A
026469 **568,00 €HT**

STARTIUM 480E
40 A
1,9 m - 16 mm² ➤ 600 A
026483 **728,00 €HT**
☎ : 025578

STARTIUM 680E
45 A
2,2 m - 25 mm² ➤ 600 A
026490 **808,00 €HT**
☎ : 025585

STARTIUM 980E
50 A
2,5 m - 35 mm² ➤ 600 A
026506 **1 030,00 €HT**

 Disconnectable

DIAG STARTIUM 60-12
60 A
2,2 m - 25 mm² ➤ 600 A
026513 **1 060,00 €HT**

DIAG STARTIUM 60-24
60 A
2,2 m - 25 mm² ➤ 600 A
026520 **1 100,00 €HT**
☎ : 025592
☎ : 076969


MADE IN FRANCE		I ₁		CHARGE 							START 			BSU				CCA I (EN) START		
				min › max	RMS / Efficace	Average / Moyen (EN 60335)		Boost	Automatic	1V/Cell	0V/Cell	AUTO START								
STARTIUM 330E	230V	16 A	0,8	6,5	12V 24V	20 › 370 Ah 20 › 300 Ah	40 A	25 A	4	—	●	12V : 24V :	165 A 130 A	270 A 210 A	●	—	100 A	26 x 26 x 47 / 15.5	28 x 28 x 47 / 16	500 A
STARTIUM 480E	230V	16 A	1,7	9	12V 24V	20 › 600 Ah 20 › 450 Ah	65 A	30 A	4	40 A	●	12V : 24V :	280 A 210 A	390 A 290 A	●	—	200 A	34 x 30 x 64 / 20.5	64 x 37 x 31 / 29	750 A
STARTIUM 680E	230V	16 A	2	10	12V 24V	20 › 675 Ah 20 › 525 Ah	75 A	30 A	4	45 A	●	12V : 24V :	380 A 270 A	550 A 380 A	●	—	200 A	34 x 30 x 64 / 25.5	65 x 37 x 31 / 31	900 A
STARTIUM 980E	230V	16 A	2	12	12V 24V	20 › 750 Ah 20 › 525 Ah	80 A	40 A	4	50 A	●	12V : 24V :	500 A 400 A	720 A 560 A	●	—	250 A	34 x 30 x 80 / 30	65 x 37 x 32 / 36	1400 A
DIAG STARTIUM 60-12	230V	16 A	2	10	12V	20 › 900 Ah	95 A	60 A	4	—	●	12V :	310 A	440 A	●	●	200 A	35 x 35 x 72 / 30.5	80 x 37 x 35 / 36	900 A
DIAG STARTIUM 60-24	230V	16 A	2	10	6V	20 › 900 Ah	65 A	40 A	4	—	●	6V :	—	—	●	●	200 A	35 x 35 x 72 / 30.5	80 x 37 x 35 / 36	900 A
					12V	20 › 900 Ah	95 A	60 A				12V :	300 A	430 A						
					24V	20 › 525 Ah	65 A	40 A				24V :	280 A	410 A						

 **Fuse x2**

100 A
Startium 330E
054394 **4,50 €HT**

200 A
Startium 480E, 680E,
Diag. 60-12, 60-24
054547 **6,50 €HT**

250 A
Startium 980E
055568 **7,50 €HT**

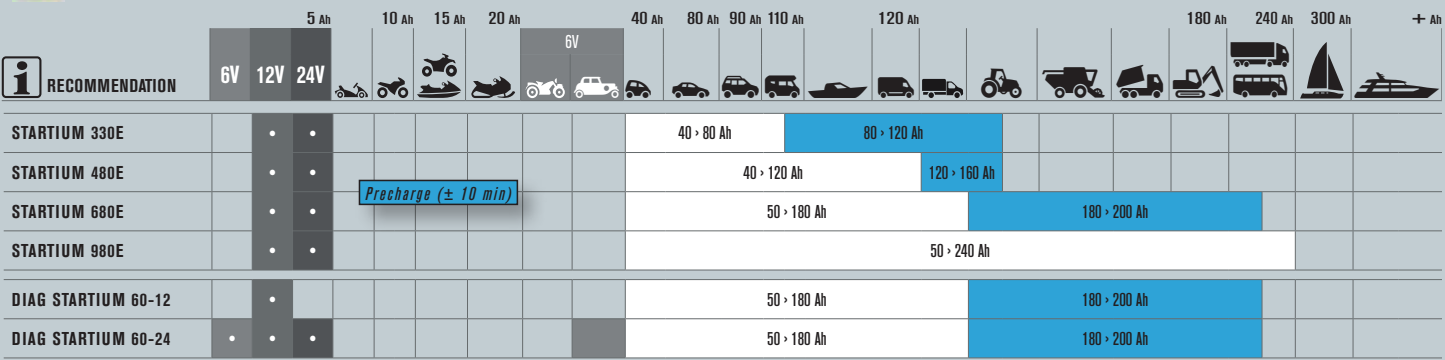



Pb inside

LITHIUM inside

SUPER CAPACITOR inside

Après chaque utilisation
After each use
Nach jeder Anwendung

[illegible]

POWER SUPPLY
12V DC



12 V

17 Ah

INSIDE

GYSACK AIR 401 

1100 A

380 A
1V/Cell

1.2m-12.5mm²

088801 179.00 € HT



GYPACK AIR

1 250 A

480 A
1V/Cell

1.1 m - 25 mm²

026322 212.00 €HT



INCLUDED GYSPACK AIR 401 / AIR

CHARGER

Ⓢ Power in 100-240 V / out 12 V
50/60 Hz
054677 13,00 € HT
054660

: 054660



FV FLEXIBLE VOLTAGE

100V 

110 V 220

GYPACK AIR

BOOSTERS • Pb INSIDE

BOOSTERS

Pb/LEAD

INSIDE

POWER SUPPLY
12V DC



12 V

18 Ah

INSIDE

HOBBIES

OCCASIONAL

PRO

INTENSIVE

GYSPACK 400

1 250 A

480 A
1V/Cell

0.6 m - 16 mm² ➔ 300 A

025455 133,00 €HT

🇬🇧: 025516



12 V

22 Ah

INSIDE

HOBBIES

OCCASIONAL

PRO

INTENSIVE

GYSPACK 600

1 750 A

550 A
1V/Cell

0.6 m - 16 mm² ➔ 300 A

027336 149,00 €HT

🇬🇧: 027497

INCLUDED GYSPACK 400 / 600 / PRO

CHARGER

⚡ Power in 100-240 V / out 12 V
50/60 Hz
054677 13,00 €HT

🇬🇧: 054660

WU

FV FLEXIBLE VOLTAGE

100V 240V

12 V

= 6 C*

24 V

= 12 C*

*C = cells, cellules



6 / 12 V

20 Ah + 20 Ah

INSIDE

HOBBIES

OCCASIONAL

PRO

INTENSIVE

GYSPACK PRO

1 750 A

600 A
1V/Cell

1.1 m - 25 mm² ➔ 500 A

026155 219,00 €HT

🇬🇧: 025523

INCLUDED GYSPACK Heritage

CHARGER

⚡ Power in 100-240 V / out 12 V
50/60 Hz
054684 41,00 €HT

🇬🇧: 054691

REGULATED 100V FAST CHARGE

FV FLEXIBLE VOLTAGE

100V 240V

	Après chaque utilisation After each use Nach jeder Anwendung		START 		Peak Battery	START PETROL & DIESEL 			Fuse 							
			Inside	1 V/Cell												0 V/Cell
DESIGN GYS FRANCE	GYSPACK 400	12V-18 Ah	12V	480 A	900 A	1250 A	Pb/Lithium LFP	—	—	—	—	 12V DC/0.5A	12V DC/1.2A	●	26 x 13 x 29.5 / 6.4	28.5 x 16 x 34 / 7.2
	GYSPACK 600	12V-22 Ah	12V	550 A	1050 A	1750 A	Pb/Lithium LFP	—	—	—	—	 12V DC	12V DC/1.2A	●	25.5 x 14 x 29.5 / 7.5	29.5 x 16 x 35.5 / 8.2
MADE IN GYS CHINA	GYSPACK PRO	12V-22 Ah	12V	600 A	1100 A	1750 A	Pb/Lithium LFP	●	●	—	—	 12V DC	12V DC/1.2A	●	35 x 14 x 37 / 9	39 x 17 x 45 / 9.5
	GYSPACK HERITAGE 6/12	6V- 2x20 Ah	6V 12V	400 A 450 A	800 A 850 A	3200 A 1600 A	Pb/Lithium LFP	●	●	1 x 300 A	—	 12V DC	12V DC/2A	●	36 x 11 x 45 / 13	39 x 22 x 51 / 14

54

 RECOMMENDATION	5 Ah			10 Ah			15 Ah			20 Ah		40 Ah	80 Ah	90 Ah	110 Ah	120 Ah			180 Ah			240 Ah	300 Ah	+ Ah																
	6V	12V	24V																																					
GYSPACK 400		•																																						
GYSPACK 600		•																																						
GYSPACK PRO		•																																						
GYSPACK HERITAGE	•	•																																						

BOOSTERS
Pb/LEAD




12 V 28 Ah INSIDE
HOBBIES OCCASIONAL PRO INTENSIVE



INCLUDED GYSPACK 660

CHARGER
Power in 100-240 V/out 12 V
50/60 Hz
027992 30,00 € HT



DESIGN GYS FRANCE

MADE IN GYS CHINA

MADE IN FRANCE

56

FOR GYSPACK 660/750/800/700/900

Fuse x2 200 A 054547 6,00 € HT 300 A 054561 6,00 € HT



OPTION


MEMORY AUTO SAVE
CABLE OBD 1,5 m
054202 23,00 € HT



Fuse 7,5 A



12 V 28 Ah SPIRAL INSIDE
HOBBIES OCCASIONAL PRO INTENSIVE

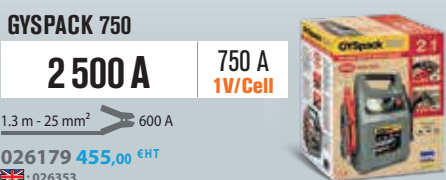

INCLUDED GYSPACK 750

CHARGER
Power in 100-240 V/out 12 V
50/60 Hz
054684 41,00 € HT



12 V 28 Ah SPIRAL INSIDE
HOBBIES OCCASIONAL PRO INTENSIVE




INCLUDED GYSPACK PRO 800

CHARGER
Power in 100-240 V/out 12 V
50/60 Hz
054684 41,00 € HT




12 V 16 Ah INSIDE
HOBBIES OCCASIONAL PRO INTENSIVE



INTEGRATED CHARGER
7 STEP

12 V 30 Ah INSIDE
HOBBIES OCCASIONAL PRO INTENSIVE



INTEGRATED CHARGER
7 STEP

RECOMMENDATION	5 Ah			10 Ah			15 Ah			20 Ah			40 Ah			80 Ah			90 Ah			110 Ah			120 Ah			180 Ah			240 Ah			300 Ah			+ Ah
	6V	12V	24V																																		
GYSPACK 660																																					
GYSPACK 750																																					
GYSPACK PRO 800																																					
GYSPACK PRO 700																																					
GYSPACK PRO 900																																					

STARTPACK

BOOSTERS

Pb/LEAD

INSIDE

PRO

YouTube

PLAYLIST

STARTPACK

SMART STARTER MANAGEMENT SYSTEM

FULL PROTECTION

On-board electronics

Over voltage

Reverse polarity

No sparks

AUTO DETECT

Battery voltage detection

Microprocessor Control

TIMER Adjustable

EXIDE TECHNOLOGIES

HIGH QUALITY BATTERIES

SPIRAL TECHNOLOGY

INCLUDED

GYSFLASH XL 6.12

1.9 m

1.9 m

6 A - Advanced technology 8 step smart charge

7 STEP

12/24 V

50 Ah SPIRAL

+

50 Ah SPIRAL

INSIDE

HOBBIES OCCASIONAL

PRO +++ INTENSIVE

STARTPACK PRO 12.24 XL

12V

8 500 A

1600 A 1V/Cell

24 V

4 250 A

1400 A 1V/Cell

2 m - 70 mm² → 1000 A

026711 2 270,00 €HT

	MADE IN FRANCE		START				START PETROL & DIESEL	CHARGE			CHARGER		Protection					
				1 V/Cell	0 V/Cell	Peak Battery			min > max					Fuse				
STARTPACK PRO 12.24 XL		2× 50 Ah	12 V	1 600 A	3 000 A	8 500 A	Pb/Lithium LFP	—	—	●	6 A outside	● automatic	●	300 A	2 m ø 70 mm²	106 x 32 x 35	112 x 35 x 43 / 68	
ENERGY STATION FP			dependant on batteries / selon batteries /je nach Batterie (Pb only)				Pb/Lithium LFP	12/24 V	100 > 375 Ah (x2)	●	30 A inside	● manual	●	300 A	2,5 m ø 50 mm²	70 x 65 x 91	80 x 53 x 28 / 29	



ENERGY STATION

Integrated charger

Autonomous booster

Start 12V engines with 2 x 12V batteries

Add additional power with a 3rd battery

Recommended ENERGY STATION FP : 2 x 120 x 170 Ah

Charge external batteries 12V only

Parallel connection not included
Connexion parallèle non incluse
Parallelschaltung nicht enthalten

Batteries not provided
Batteries non fournies
Ohne Batterie geliefert

24V

12V

FULL PROTECTION

On-board electronics

Over voltage

No sparks

Reverse polarity

ENERGY STATION FP

12V / 24V

GYS

12V 24V

6 STEP

INTEGRATED CHARGER

12/24 V

HOBBIES OCCASIONAL

PRO INTENSIVE +++

ENERGY STATION FP

069589 1 020,00 €HT

5 Ah 10 Ah 15 Ah 20 Ah 40 Ah 80 Ah 90 Ah 110 Ah 120 Ah 180 Ah 240 Ah 300 Ah + Ah

RECOMMENDATION

12V 24V

STARTPACK PRO 12.24 XL

ENERGY STATION FP

250 Ah

35 > 375 Ah

12/24 V

HOBBIES OCCASIONAL

PRO INTENSIVE +++

ENERGY STATION FP

069589 1 020,00 €HT

INTEGRATED CHARGER

6 STEP

 RECOMMENDATION	5 Ah		10 Ah		15 Ah		20 Ah		6V		40 Ah		80 Ah		90 Ah		110 Ah		120 Ah		180 Ah		240 Ah		300 Ah		+ Ah			
	12V	24V																												
STARTPACK PRO 12.24 XL	•	•																											• 250 Ah	  
ENERGY STATION FP	–	–																											35 • 375 Ah	  

SELECT THE RIGHT BOOSTER
CHOISISSEZ VOTRE BOOSTER • WÄHLEN SIE IHREN BOOSTER AUS

6/12 V		12 V										12-24 V				
GYSPACK HERITAGE		GYSPACK AIR 401	GYSPACK AIR	GYSPACK 400	GYSPACK 600	GYSPACK PRO	GYSPACK 660	GYSPACK PRO 700	GYSPACK 750	GYSPACK PRO 800	GYSPACK PRO 900	STARTPACK TRUCK/ TRUCK MOBILE	STARTPACK 12.24 CI	STARTPACK PRO 12.24 CI	STARTPACK PRO 12.24 XL	ENERGY STATION FP
025844		088801	026322	025455	027336	026155	027862	027077	026179	068759	027084	025448/ 026025	024991	028920	026711	069589
6 V		12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V
12 V		12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	24V	24V	24V	24V	24V
	1V/Cell	400 (6 V)	380 A	480 A	480 A	550 A	600 A	640 A	640 A	750 A	700 A	830 A	750 (12 V)	900 A (12 V)	1300 A (12 V)	1600 A (12 V)
	450 (12 V)												650 (24 V)	700 A (24 V)	1200 A (24 V)	1400 A (24 V)
	800 (6 V)												1450 A (12 V)	1700 A (12 V)	2400 A (12 V)	3000 A (12 V)
	0V/Cell	850 (12 V)	700 A	900 A	900 A	1050 A	1100 A	1200 A	1200 A	1450 A	1320 A	1700 A	1300 A (24 V)	1350 A (24 V)	2250 A (24 V)	2600 A (24 V)
	850 (12 V)												3200 A (12 V)	3600 A (12 V)	6200 A (12 V)	8500 A (12 V)
	3200 (6 V)	1100 A	1250 A	1250 A	1750 A	1750 A	1900 A	1800 A	2500 A	2500 A	3100 A	1600 A (24 V)	1800 A (24 V)	3100 A (24 V)	4250 A (24 V)	
	1600 (12 V)															
		2 x 20 Ah	17 Ah	18 Ah	18 Ah	22 Ah	22 Ah	28 Ah	16 Ah	28 Ah	28 Ah	30 Ah	2 x 22 Ah	2 x 16 Ah	2 x 30 Ah	2 x 50 Ah
		external	external	external	external	external	external	internal	external	external	external	internal	external	internal	internal	internal
		2 A	1 A	0,5 A	0,5 A	0,5 A	0,5 A	2 A	2,5 A	2 A	2 A	2,5 A	2 A	4 A	4 A	6 A
		IUoU	WU	WU	WU	WU	WU	IUoU	7 step	IUoU	IUoU	7 step	IUoU	7 step	7 step	7 step
		12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC			
		1,8 m	1,2 m	1,1 m	0,6 m	0,6 m	1,1 m	1,3 m	1,4 m	1,3 m	1,8 m	1,8 m	1,8 m	1,8 m	2 m	2 m
		ø25 mm²	ø12,5 mm²	ø25 mm²	ø16 mm²	ø16 mm²	ø25 mm²	ø25 mm²	ø25 mm²	ø25 mm²	ø25 mm²	ø35 mm²	ø25 mm²	ø35 mm²	ø50 mm²	ø70 mm²
		37x20x46	31x19x32	33x17x37	26x10x29	26x10x29	35x14x37	35x19x40	33x15x32	35x19x40	31x19x35	33x15x32	37x20x46/ 37x20x57	34x18x46	63x39x30	112x35x43
		18 kg	7,4 kg	8,5 kg	6,5 kg	6,5 kg	9 kg	13,5 kg	12 kg	13,5 kg	18,4 kg	16 kg	18/21 kg	22 kg	34 kg	68 kg

After each use
Après chaque utilisation
Nach jeder Anwendung

CAUTION ON STAND BY
Keep your GYSPACK connected to the mains supply.

ATTENTION HORS UTILISATION
Laisser en charge en permanence.

ACHTUNG WENN NICHT IN GEBRAUCH
Ladegerät dauernd angeschlossen lassen.

ATTENTION CUANDO ESTA APAGADO
Dejar el cargador conectado permanentemente.

ATTENZIONE FUORI USO
Lasciare sempre in carica.

★

★★★★

★★★★★

MINI PRO PRO UNIVERSAL PRO



NATO / OTAN : COMPATIBLE PRODUCTS
- Produits compatibles - Kompatible Produkte



NATO ID / NCAGE : F8154 CG730

	GYSLASH 30.12, 50.12 FV, 51.12, 100.12, 101.12 CNT	GYSLASH 101.24 CNT FV, 121.12 CNT FV, 125.12 CNT FV, 157.12 CNT FV	GYSLASH 123.12 CNT FV, 103.24 CNT FV, 107.24 CNT FV	GYSLASH 108.12 CNT FV, 148.12 CNT FV, 158.12 CNT FV	GYSLASH 53.48 CNT FV	GYSLASH 15.24 XTREM	STARTIUM 980E	STARTPACK PRO 12.24 XL
NATO CONNECTOR 026780 99,00 € HT								
Anderson/NATO 5 m - 16 mm² 026810 279,00 € HT	✓	—	—	—	✓	—	—	—
Texas/NATO 5 m - 25 mm² 025707 306,00 € HT	—	✓	✓	✓	—	—	—	—
10 m - 25 mm² 056626 499,00 € HT	—	—	—	—	—	—	—	—
Texas/NATO 3.5 m - 50 mm² 025653 295,00 € HT	—	—	—	—	—	✓	—	—
Anderson/NATO 2 m - 50 mm² 026803 286,00 € HT	—	—	—	—	—	—	✓	—
3 m - 50 mm² 072589 338,00 € HT	—	—	—	—	—	—	—	—
2pts/NATO 5 m - 4 mm² 025837 255,00 € HT	—	—	—	—	—	✓	—	—
2pts/NATO Spiral 5 m 028968 385,00 € HT	—	—	—	—	—	✓	—	—





TRACTION BATTERIES : COMPATIBLE PRODUCTS
- Produits compatibles - Kompatible Produkte

BATIUM 25/24 X

GYSLASH 30.24, 50.24 & 101.24

GYSLASH 103.24 & 53.48

		TYPE	6 h	7 h	8 h	9 h	10 h	11 h	12 h	13 h	14 h	CURRENT
24 V	BATIUM 25.24 X	liquid	75 Ah	90 Ah	120 Ah	125 Ah	130 Ah	140 Ah	155 Ah	165 Ah	180 Ah	25 A
	GYSLASH 30.24 HF	liquid	—	—	—	75 Ah	85 Ah	105 Ah	125 Ah	145 Ah	175 Ah	15 A
		gel	—	—	—	—	—	75 Ah	85 Ah	105 Ah	120 Ah	
	GYSLASH 50.24 HF	liquid	—	—	—	250 Ah	290 Ah	350 Ah	410 Ah	480 Ah	550 Ah	50 A
		gel	—	—	—	—	—	260 Ah	290 Ah	340 Ah	400 Ah	
	GYSLASH 51.12	liquid	130 Ah	150 Ah	180 Ah	210 Ah	240 Ah	270 Ah	310 Ah	350 Ah	390 Ah	25 A
		gel	—	—	130 Ah	150 Ah	160 Ah	180 Ah	200 Ah	220 Ah	240 Ah	
	GYSLASH 101.24	liquid	390 Ah	470 Ah	550 Ah	630 Ah	720 Ah	820 Ah	930 Ah	1050 Ah	1200 Ah	100 A
		gel	—	—	400 Ah	450 Ah	500 Ah	560 Ah	610 Ah	670 Ah	720 Ah	
	GYSLASH 103.24	liquid	490 Ah	580 Ah	680 Ah	790 Ah	900 Ah	1020 Ah	1160 Ah	1310 Ah	1500 Ah	100 A
GYSLASH 107.24		gel	—	—	500 Ah	560 Ah	630 Ah	700 Ah	760 Ah	830 Ah	900 Ah	
36 / 48 V	GYSLASH 25.48	liquid	130 Ah	150 Ah	180 Ah	210 Ah	240 Ah	270 Ah	310 Ah	350 Ah	390 Ah	25 A
		gel	—	—	130 Ah	150 Ah	160 Ah	180 Ah	200 Ah	220 Ah	240 Ah	
	GYSLASH 51.48	liquid	260 Ah	310 Ah	360 Ah	420 Ah	480 Ah	540 Ah	610 Ah	690 Ah	790 Ah	50 A
		GYSLASH 53.48	gel	—	—	260 Ah	300 Ah	330 Ah	370 Ah	400 Ah	440 Ah	

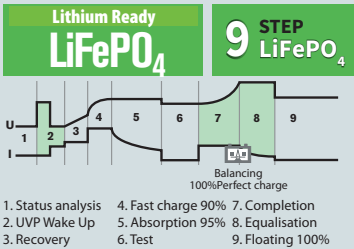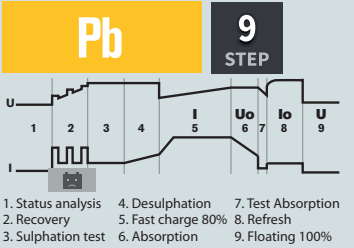

100 A		Cables Anderson 175A/Texas
	5 m - 25 mm²	025721 193,00 € HT
100 A		Cables REMA 160A/Texas
	5 m - 25 mm²	025714 229,00 € HT
15 A		Cables REMA 160A/Anderson
	5 m - 16 mm²	069091 189,00 € HT
50 A		Cables Anderson 175A/Anderson
	5 m - 16 mm²	069107 128,00 € HT

BOOSTERS

LITHIUM

INSIDE

 SPECIALIST HOBBY • Non professional use • Utilisation non professionnelle • Nicht für gewerblichen Gebrauch.

-  START ENGINE
-  POWER BANK
- 
-  LIGHT

INCLUDED

 SUPER-SAFE SMART STARTING CABLE







12V

NOMAD POWER 401

900 A

350 A

1V/Cell



0,28 m - 5,2 mm²
AWG10
SUPER-SAFE
SMART STARTING
CABLE

087316 102,00 €HT

NOMAD POWER 501

1200 A

500 A

1V/Cell



0,28 m - 5,2 mm²
AWG10
SUPER-SAFE
SMART STARTING
CABLE

087323 118,00 €HT

	 LITHIUM			 START			 START PETROL & DIESEL	 INPUT	 OUTPUT	 cm	 kg
	CAPACITY/CELL	TYPE	FULL CHARGE	1V/Cell	0V/Cell	Peak Battery					
NP 401	2.5 Ah - 37 Wh	LiCoO2	3 h	350 A	700 A	900 A	12 V (Pb only)	USB-C : 5V/2A	(×1) USB 3.0 QC : 5/9/12V - 2A (×1) USB-A : 5V - 2.1A	14.5 × 8.5 × 3	0.37
NP 501	3 Ah - 45 Wh	LiCoO2	3 h 30	500 A	1000 A	1200 A	12 V (Pb only)	USB-C : 5V/2A	(×1) USB 3.0 QC : 5/9/12V - 2A (×1) USB-A : 5V - 2.1A (×1) JACK DC ø5.5 : 15V - 5A	17.5 × 8.5 × 3	0.46
NP PRO 701	4 Ah - 59.2 Wh	LiCoO2	3 h	700 A	1100 A	1250 A	12 V (Pb only)	USB-C : 5V/3A	(×1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (×1) USB-A : 5V - 2.1A (×1) USB-C : 5V - 3A (×1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.62
NP PRO 801	5 Ah - 74 Wh	LiCoO2	4 h	850 A	1300 A	1500 A	12 V (Pb only)	USB-C : 5V/3A	(×1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (×1) USB-A : 5V - 2.1A (×1) USB-C : 5V - 3A (×1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.73
NP PRO 901 FC	6 Ah - 92.5 Wh	LiCoO2	5h (with 15W charger) 1h15 (with 67W charger)	900 A	1400 A	1700 A	12 V (Pb only)	PD USB-C : 60W max	(×1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (×1) USB-A : 5V - 2.1A (×1) USB-C Power Delivery : 60W (×1) JACK DC ø5.5 : 15V - 10A	22.8 × 10 × 3.8	0.79



Normal charge 100% in 3 h

Normal charge 100% in 4 h

FAST CHARGE
100% in 1 h 15

12 V

NOMAD POWER PRO 701

1250 A

700 A

1V/Cell



0,26 m - 8,3 mm²
AWG8
SUPER-SAFE
SMART STARTING
CABLE


085855 162,00 €HT

NOMAD POWER PRO 801

1500 A

850 A

1V/Cell



0,26 m - 8,3 mm²
AWG8
SUPER-SAFE
SMART STARTING
CABLE

085831 198,00 €HT

NOMAD POWER PRO 901 FC

1700 A

900 A

1V/Cell



0,26 m - 8,3 mm²
AWG8
SUPER-SAFE
SMART STARTING
CABLE

085879 247,00 €HT

Recommendation 												
	5 > 70 Ah											
NP 401												
NP 501												
NP PRO 701												
NP PRO 801												
NP PRO 901 FC												

OPTION







NOMAD POWER

BOOSTERS

LITHIUM

INSIDE

SPECIALIST HOBBY • Non professional use • Utilisation non professionnelle • Nicht für gewerblichen Gebrauch.

3 Lights modes
Normal
Flashing
S.O.S

NEW
12 2025

3 Lights modes
Normal
Flashing
S.O.S

NEW
12 2025

OPTION

67 W Fast USB-C Charger
✓ Nomad Power PRO 901 FC
087132 36,00 €HT

15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701
/ PRO 801 / PRO 901 FC
087101 11,00 €HT

15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701
/ PRO 801 / PRO 901 FC
087354

218 Wh

NEW
11 2025

NOMAD POWER
12/24 V
088931 510,00 €HT

★★★★★

Ultra High Capacity

499+ Wh

NEW

NOMAD
POWER
PRO 12/24 V
088566 720,00 €HT

Maximum
autonomy

× 2

Increased
vehicle starts

3 Lights modes
Normal
Flashing
S.O.S

12 V

NOMAD POWER PRO XL

2000 A

1000 A
1V/Cell

0,7 m - 21 mm²
AWG4

+

USB-C / USB-C

088818 255,00 €HT

NOMAD POWER PRO XXL

3200 A

1500 A
1V/Cell

0,6 m - 21 mm²
AWG4

+

088924 445,00 €HT

12 / 24 V

NOMAD POWER PRO TRUCK

2000 A

600 A
1V/Cell

0,55 m - 13,3 mm²
AWG6

+

027527 361,00 €HT
028845

NOMAD POWER 12/24 V

4000 A

2300 A
1V/Cell

0,7 m - 21 mm²
AWG4

+

088931 510,00 €HT

NOMAD POWER PRO 12/24 V

5000 A

2300 A
1V/Cell

0,7 m - 21 mm²
AWG4

+

088566 720,00 €HT

MADE IN CHINA	LITHIUM			START			START PETROL & DIESEL	INPUT	OUTPUT		POWER BANK		cm	kg
	CAPACITY/CELL	TYPE	FULL CHARGE	1 V/Cell	0 V/Cell	Peak Battery					OBD supply compatibility (with 054202)			
NP PRO XL	8 Ah - 118.4 Wh	LiPo	2 h with 67 W Fast USB-C charger 6.5 h with 15 W USB-C charger	1000 A	1500 A	2000 A	12 V (Pb/Lead only)	—	(×1) USB-C : 60 W max (×1) USB-A : 5 V - 2.4 A	(×1) USB 3.0 Quick charge : 5/9/12 V (×1) DC : 12/16 V - 10 A	—		31.1 × 15.2 × 6,5	2.2
NP PRO XXL	10.4 Ah - 153.9 Wh	LiCoO2	3 h	1500 A	2500 A	3200 A	12 V (Pb/Lead only)	(×1) USB-C : 5/9 V - 2 A/ 9 V - 2 A JACK DC 16.8 V/4 A	(×1) USB-A : 5 V - 2.4 A (×1) USB-A : 5 V - 1 A		—		25.2 × 15 × 18.8	3.1
NP PRO TRUCK	6 Ah - 155.4 Wh	LiCoO2	7 h	600 A	1500 A	2000 A	12 V/24 V (Pb/Lead only)	QC USB-C : 18 W max	(×1) USB-A : 5 V - 1 A (×1) USB-A : 5 V - 2.1 A	(×1) Cigarette Lighter : 12 V - 10 A	•		24.8 × 24.8 × 9.6	2.4
NP 12/24V	8.4 Ah - 218 Wh	LiCoO2	4 h	1900 A	3000 A	4000 A	12 V/24 V (Pb/Lead only)	(×1) USB-C : 5 V - 2 A/ 9 V - 2 A JACK DC 29 V/5 A	(×2) USB-A : 5 V - 2.4 A		•		29.5 × 24.5 × 17.5	4.4
NP PRO 12/24V	19.5 Ah - 499.59 Wh	LiCoO2	7 h	2300 A	3500 A	5000 A	12 V/24 V (Pb/Lead only)	JACK DC ø5.5: 29 V - 5 A USB-C: 5V/2A 9 V/2 A	(×2) USB-A : 5 V - 2.4 A		•		24.6 × 24.5 × 15	5.4

Recommendation																
NP PRO XL	5 > 180 Ah															
NP PRO XXL	5 > 180 Ah															
NP PRO TRUCK	5 > 140 Ah															
NP 12/24V	5 > 180 Ah : 12 V															
NP PRO 12/24V	5 > 180 Ah : 12 V															

67

NOMAD POWER

LITHIUM INSIDE

66



BOOSTERS SUPER CAPACITOR

INSIDE

SUPER CAPACITOR TECHNOLOGY FOR STARTRONIC & GYSCAP






- ✓ NO BATTERY INSIDE
- ✓ NO MAINTENANCE
- ✓ FAST TO USE

- ✓ BOOSTER SANS BATTERIE INTERNE
- ✓ AUCUNE MAINTENANCE
- ✓ RAPIDE D'UTILISATION

- ✓ KEINE INTERNE BATTERIE
- ✓ KEINE WARTUNG
- ✓ SCHNELL EINSETZBAR

FULL
PROTECTION

-40/+65°C

1 MILLION
CYCLESFAST
CHARGENO SULFATION
DURING
STORAGEUNLIMITED
STARTS

CHARGING MODES

	Vehicle battery	Cigarette lighter	Internal lithium battery
STARTRONIC 800	✓	✓	—
STARTRONIC HYBRID 900	✓	✓	✓
STARTRONIC SUPERCAP 12/24 V	✓	—	—

DC/DC CONVERTER INSIDE (>5V)



800 : 4 minutes
HYBRID 950 : 4 minutes
SUPERCAP 12 / 24 V : 5 minutes



INCLUDED
STARTRONIC 800
& HYBRID 950
CIGARETTE LIGHTER
for Easy charge
027404 6,40 € HT
12 V



- ✓ SMART
- ✓ SAFE
- ✓ POWERFUL



- ➕ Output USB
- ➕ Light

INCLUDED
Internal lithium battery
027411 21,50 € HT



100 % → Recharge the
supercapacitors 5 times

5×
800
F

INSIDE

12 V

STARTRONIC 800

800 A

12 V

DC/DC
converter

026735 305,00 € HT



5×
950
F

INSIDE

STARTRONIC HYBRID 950

950 A

12 V

DC/DC
converter

026117 380,00 € HT



12 V / 24 V

10×
900
F

INSIDE

STARTRONIC SUPERCAP 12 / 24V

1050 A

12 V

DC/DC
converter

880 A

24 V

082816 770,00 € HT



MADE IN CHINA							⚡ INPUT CHARGE						🕒 Charging time				LIGHT	↕ cm	🧑 kg
	START 		 START PETROL & DIESEL		Number of Capacitors	Integrated Inverter	 12 V		 12 V/10 A				 5 V / 2 A		internal lithium battery				
	1 V/Cell	0 V/Cell Peak					🔌 OFF	🔌 ON	🔌 OFF	🔌 ON			MICRO USB Type B						
STARTRONIC 800	800 A	1 400 A	—	Pb only	12 V	5 × 800 F	●	4 min	60 s	4 min	4 min			5 V/2 A	40 min	—	—	26,7 × 19,5 × 5	1,86
STARTRONIC HYBRID 950	950 A	1 660 A	—	Pb only	12 V	5 × 950 F	●	4 min	60 s	4 min	4 min			5 V/2 A	40 min	30 min	●	25 × 18,5 × 6	1,86
STARTRONIC SUPERCAP 12/24V	1 050 A	1 800 A	—	Pb only	12 V	10 × 900 F	●	5 min	3 min	—	—			—	—	—	—	34 × 43 × 20	7
	880 A	1500 A			2 min			2 min											



Recommendation

STARTRONIC 800

5 × 90 Ah

STARTRONIC HYBRID 950

5 × 100 Ah


STARTRONIC SUPERCAP 12/24V

5 × 150 Ah





GYSCAP



SMART STARTER MANAGEMENT SYSTEM

SUPER CAPACITOR TECHNOLOGY



FULL PROTECTION -40/+65°C



- ✓ NO BATTERY INSIDE
- ✓ NO MAINTENANCE
- ✓ FAST TO USE

- ✓ BOOSTER SANS BATTERIE INTERNE
- ✓ AUCUNE MAINTENANCE
- ✓ RAPIDE D'UTILISATION
- ✓ KEINE INTERNE BATTERIE
- ✓ KEINE WARTUNG
- ✓ SCHNELL EINSETZBAR




1 MILLION CYCLES



FAST CHARGE



NO SULFATION DURING STORAGE



UNLIMITED STARTS

NEW 03/2026



12 V

5x 3000 F INSIDE

GYSCAP 12V DC/DC

1 600 A

DC/DC converter

087651 980,00 €HT

1.7 m - 25 mm² Cables 100% Cu



24 V

10x 3000 F INSIDE

GYSCAP 24V DC/DC

2 500 A

DC/DC converter

088504

2 m - 35 mm² Cables 100% Cu



GYSCAP 24V

2 500 A


028944 1 400,00 €HT

2 m - 50 mm² Cables 100% Cu



CHARGING MODES

On charged vehicle battery



12 V



24 V

GYSCAP 12V & TWIN START EV 12V DC/DC

max 2 min 30
max 9 min

GYSCAP 24V DC/DC

max 20 min

GYSCAP 24 V

max 1 h


max 4 min

max 2 min 30
max 10 min


max 1 min 30
max 30 min

DC/DC CONVERTER


On discharged vehicle battery



1-2 min



~1-2 min




~1-2 min

✓ E.C.U. memory protect

✓ Alternator protection max 50 A (against overload)

Recharge your booster for the next start



4.12 + F5 p.6
029422 029439
12.12 + S7 p.7
029392 077331

max 15 min max 8 min

max 30 min max 16 min

max 1 h max 1 h



GYSCAP

TWIN START

★★★★★

The Complete & Safe solution

for combustion & EV engine

NEW 03/2026



12 V

5x 3000 F INSIDE

GYSCAP TWIN-START EV 12V DC/DC

1 600 A

DC/DC converter TWIN

089990 1 190,00 €HT

Cables 100% Cu 1.7 m - 25 mm²




BREVET GYS
GYS PATENT



2IN1

+ 12 V Booster

+ Special EV Rescue

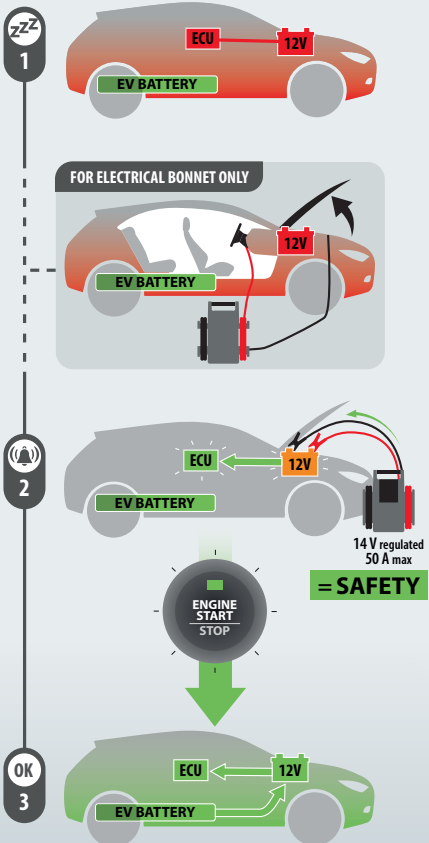

GYSCAP

BOOSTERS • SUPER CAPACITORS INSIDE

MADE IN FRANCE

	START						Number of Capacitors	DC/DC	INPUT CHARGE			
	1 V/Cell	0 V/Cell	Peak									
GYSCAP 12V DC/DC	1 600 A	2 700 A	10 000 A	Pb/Lithium LFP	12 V	—	5 × 3000 F	•	8-16V / 50 A max	4,5V-30V / 8 A max	35 × 44 × 19	7,2
GYSCAP TWIN-START EV 12V DC/DC	1 600 A	2 700 A	10 000 A	Pb/Lithium LFP	12 V	14V/50A max	5 × 3000 F	•	8-16V / 50 A max	4,5V-30V / 8 A max	35 × 44 × 19	7,2
GYSCAP 24V DC/DC	2 500 A	4 500 A	10 000 A	Pb/Lithium LFP	24 V	—	10 × 3000 F	•	16-32V / 50 A max	4,5V-30V / 8 A max	35 × 38 × 20	13
GYSCAP 24V	2 500 A	4 500 A	10 000 A	Pb/Lithium LFP	24 V	—	10 × 3000 F	—	24V	10-30 V (150 W max)	32 × 49 × 21.5	14
Recommendation												
GYSCAP 12V DC/DC												
GYSCAP TWIN-START EV 12V DC/DC												
GYSCAP 24V DC/DC												
GYSCAP 24V												
225 Ah												
225 Ah												



CONVERGYS / PSW / MSW

POWER INVERTERS

12/24 V DC > 230 V AC



PSW REMOTE CONTROL

For 601W-12



6 m




For 1002W RC-12, 1502W RC-12, 2002W RC-12, 2002W RC-24, 3000W RC-12, 000V RC-24



6 m


Input = 888 V
Output = 888 W

MSW / PSW TECHNOLOGY





- Under-voltage / Over-voltage / Overload / Overheating / Output short-circuit
- Tension faible / Surtension / Surcharge / Surchauffe / Court-circuit
- Unterspannung / Überspannung / Überlastung / Überhitzung / Kurzschluss am Ausgang

Power based on output voltage
Puissance en fonction de la tension de sortie
Leistung in Abhängigkeit von der Ausgangsspannung



Power based on temperature
Puissance en fonction de la température
Leistung in Abhängigkeit von der Temperatur



SELECT THE RIGHT POWER INVERTER

- CHOISISSEZ VOTRE CONVERTISSEUR
- WÄHLEN SIE IHREN WECHSELRICHTER

HOME APPLIANCE - ÉLECTROMÉNAGER				
Microwave - Micro-Ondes - Mikrowelle		700 - 1000 W	30 - 50 min	1 h 30 - 2 h
Toaster - Grille Pain		800 - 1500 W	20 - 40 min	1 h - 2 h
Fridge - Réfrigérateur - Kühlschrank (40 L)		45 W	12 h	35 h
Kettle - Bouilloire - Wasserkocher		700 - 2500 W	15 - 45 min	35 min - 2 h
Espresso coffee maker - Cafetière espresso - Espresso-Maschine		1000 - 1600 W	20 - 30 min	1 h - 1 h 30
Drip coffee maker - Cafetière filtre - Filterkaffee-Maschine		800 - 1200 W	25 - 40 min	1 h 30 - 2 h
ELECTRONIC - ÉLECTRONIQUE				
Mobile phone - Téléphone - Telefon		5 - 10 W	55 - 110 h	155 - 310 h
Laptop - Ordinateur portable		60 - 95 W	5 - 9 h	16 - 28 h
Radio		10 - 40 W	14 - 55 h	40 - 155 h
TV 15"		40 W	13 h 30	39 h
TV 21"		50 W	11 h	31 h
Video game console - Console de jeux vidéo - Konsole für Videospiele		39 - 100 W	5 - 13 h	16 - 39 h
Camera - Appareil photo - Fotoapparat		4 - 19 W	25 - 135 h	78 - 390 h
COMFORT - CONFORT				
Light - Eclairage - Beleuchtung		100 W	5 h 30	16 h
Electrical heater - Chauffage électrique - Elektrische Heizung		1800 - 2500 W	12 - 20 min	35 - 45 min
Fan - Ventilateur - Lüfter		50 W	11 h	31 h
Hairdryer - Sèche cheveux - Fön		1000 - 2000 W	15 - 30 min	45 min - 1h 30
SAILING - NAUTISME				
Navigation lights - Feux de navigation - Navigationslichter		24 W	30 h	80 h
Radar		24 W	30 h	80 h
Autopilot mode - Pilote automatique		60 W	9 h	30 h
GPS/Sat nav. - GPS		6 W	110 h	310 h

* Usage duration (h) = $\frac{80\% \times \text{Capacity (Ah)} \times \text{Optimum Efficiency (\%)} \times \text{Input DC (V)}}{\text{Power (W)}}$

MADE IN CHINA	Power	Peak power	Pure Sin Wave	Optimum Efficiency	Input DC	Output AC	Output USB (2.1) DC	max 150W	1.5mm²	2.5mm²	Universal	1.5mm²	1.5kg	cm	L x W x H cm / kg
CONVERGYS 150	150W	300W	—	90,5%	12V	230V	5V · 2A	•	—	1.5mm²	•	—	0,5 kg	N/A	8 × 16.5 × 24.7 / 0.45
CONVERGYS 300	300W	600W	—	85%	12V	230V	5V · 2A	•	•	2.5mm²	•	—	0,95 kg	N/A	21.3 × 20 × 6.8 / 0.95
PSW 601W RC-12	600W	1200W	•	90%	12V	230V	5V · 2A	—	cables	6mm²	•	•	6m	2,2 kg	26.5 × 17 × 7.5
PSW 1002W RC-12	1000W	2000W	•	90%	12V	230V	5V · 2A	—	cables	10mm²	•	•	6m	4,7 kg	37.5 × 21 × 10
PSW 1502W RC-12	1500W	3000W	•	90%	12V	230V	5V · 2A	—	cables	16mm²	•	•	6m	5 kg	37.5 × 21 × 10
PSW 2002W RC-12	2000W	4000W	•	90%	12V	230V	5V · 2A	—	cables	22mm²	•	•	6m	6,25 kg	38.5 × 25 × 10
PSW 3000W RC-12	3000W	6000W	•	85%	12V	230V	5V · 2A USB-C 18W (5V/3.1A - 9V/2A - 12V/1.5A)	—	cables	18mm²	•	•	6m	10,7	49.8 × 28.8 × 14.2
MSW 82000	2000W	4000W	—	80%	24V	230V	5V · 2A	—	cables	12mm²	•	•	—	5,8 kg	35 × 20 × 28
PSW 2002W RC-24	2000W	4000W	•	90%	24V	230V	5V · 2A	—	cables	12mm²	•	•	6m	6,25 kg	38.5 × 25 × 10
PSW 3000W RC-24	3000W	6000W	•	85%	24V	230V	5V · 2A USB-C 18W (5V/3.1A - 9V/2A - 12V/1.5A)	—	cables	18mm²	•	•	6m	10,7	49.8 × 28.8 × 14.2

12 V



CONVERGYS


CONVERGYS 150
027022 49,00 €HT



CONVERGYS 300
027053 66,00 €HT
027046



12 V



PURE SINE WAVE

PSW
601W RC-12

067332 175,00 €HT
067349



PSW
1002W RC-12

067356 310,00 €HT
067363



PSW
1502W RC-12

067370 385,00 €HT
067387



PSW
2002W RC-12

067394 530,00 €HT
067400



PSW
3000W RC-12

089853 710,00 €HT




NEW
01/2026

24 V



MODIFIED SINE WAVE


24 V



PURE SINE WAVE

MSW 82000

027237 360,00 €HT
027244

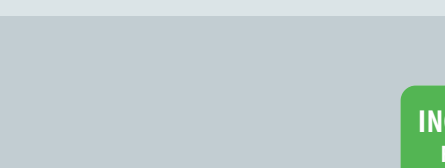


PSW
2002W RC-24

067417 530,00 €HT
067424



PSW
3000 RC-24

089860 715,00 €HT

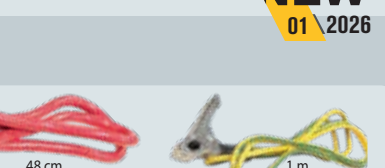

NEW
01/2026


INCLUDED
FOR ALL



48 cm



48 cm



1 m



POWER PACK

PORTABLE ENERGY


DC/AC - Li inside

OPTIONS

Solar panel

for Power pack 520, 14.22, Energys DC/DC
monocrystalline
ETFE quality - 18V - 100 W max

OUTPUT
USB 1 : 5V/3A
USB 2 : 5V/3A ; 9V/2A ; 12V/1.5A
Type C : 5V/3A ; 9V/2A ; 12V/1.5A
Jack : 18V/5.6A max
079410 **244,00 € HT**

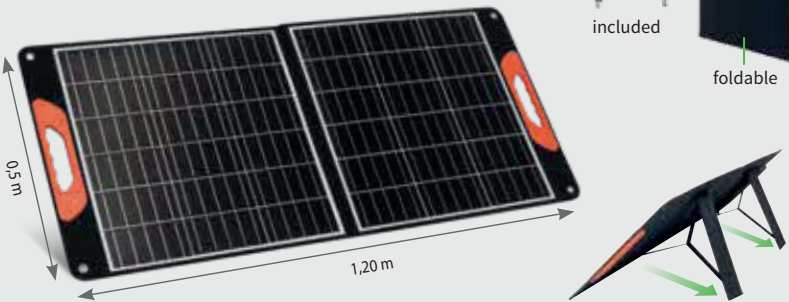

3 MODES
Light / S.O.S. / Flash



5 MODES
Light (Low, Medium, High) / S.O.S. / Flash



POWER PACK 520

518 Wh

500 W

027961 **495,00 € HT**



POWER PACK 14.22

1408 Wh

2200 W

085206 **1 490,00 € HT**



USAGE DURATION

	50 W	100 W	250 W	500 W	1000 W	1500 W	2200 W
POWER PACK 520	8 h	4 h	1 h 40	50 min	—	—	—
POWER PACK 14.22	22 h	11 h	4 h 30	2 h 15	1 h 05	45 min	30 min
POWER PACK 14.15 FC	22 h	11 h	4 h 30	2 h 15	1 h 05	45 min	—

FULL PROTECTION

Short-circuit protection,
Over-current protection,
Over-voltage protection,
Under-voltage protection
Over-load protection,
Temperature protection

MPPT
integrated

Solar panel
compatibility

OPTIONS



5 MODES
Light (Low, Medium, High) / S.O.S. / Flash


FAST CHARGE

100% in 60min
Built-in charger

Power batt 14 External battery

for Power pack 14.15 FC
085213 **860,00 € HT**

1408 Wh - LiFePO4
42 x 30 x 25.5 cm / 12.8 kg




2816 Wh
Using
time (x2)



Solar panel
for Power pack 14.15 FC
079403 **390,00 € HT**

monocrystalline - ETFE quality
48V - 220 W max
OUTPUT : **MC4**

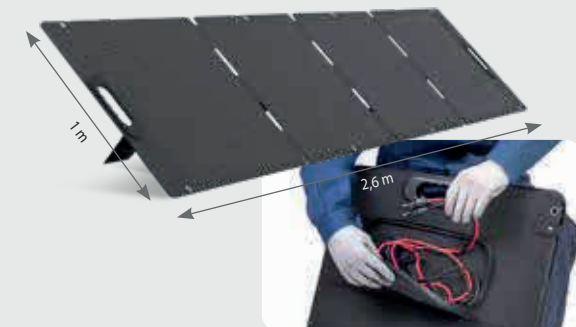

POWER PACK 14.15 FC

1408 Wh

1500 W

085169 **1 600,00 € HT**



	LITHIUM Battery		INPUT	RECHARGING TIME			AC OUTPUT			DC OUTPUT	LIGHT	BOOSTER			OPTION COMPATIBILITY		L x W x H cm / kg	L x W x H cm / kg
	CAPACITY	TYPE		MAINS 0-100 %	SOLAR PANEL 0-100 % (depending on weather conditions)	DC CHARGING 0-100 %	230 V / 50 Hz (Pure Sine Wave)	Rating Power OUT	Peak Power OUT			12V Petrol & Diesel (Lead / LFP)	1V/Cell	0V/Cell	SOLAR PANEL	EXTERNAL BATTERY		
POWER PACK 520	20 Ah 518 Wh	LiPo	JACK DC ø3.5 (Main / solar charging): 12-30V 80W PD USB-C (DC charging): 45W	6 h 30	8 h 30 - 11 h 30	11 h 30	(x2) Type C / E / F / G / I	500 W	750 W (3sec)	(x1) PD USB-C : 45W max (x1) QC USB-C : 18W max (x2) USB-A : 5V - 2.4A	(x1) LED	—	—	—	•	—	26.4 x 23.4 x 16.3 / 5.14	33.5 x 23 x 34.5 / 6.2
POWER PACK 14.22	55 Ah 1408 Wh	LFP	JACK DC ø5.5 (Main / solar charging): 12-30V 200W	7 h 30	13 h - 15 h	—	(x3) Type C / E / F (euro plug)	2200 W	4400 W	(x3) USB-A : 5V - 2.4A (x1) QC USB-A : 18W max (x2) PD USB-C : 100W max	(x1) LED	•	500 A	1000 A	•	—	36 x 27 x 28 / 17.1	—
POWER PACK 14.15 FC	55 Ah 1408 Wh	LFP	C14 EURO PLUG (AC charging): 230Vac 1500W ANDERSON (solar charging): 30-60V 400W JACK DC ø5.5 (DC charging): 12V 120W	1 h	6 h - 8 h	11 h	(x3) Type C / E / F (euro plug)	1500 W	3000 W	(x3) USB-A : 5V - 2.4A (x1) QC USB-A : 18W max (x2) PD USB-C : 100W max	(x1) LED	•	500 A	1000 A	•	•	36 x 27 x 28 / 19.3	43 x 36.5 x 33.5 / 22



RECOMMENDATION

	Game	Phone	Tools	Laptop	TV	Tablet	Printer	Drill	Saw	Hammer	Nail gun	Blower	Vacuum	Washing machine	Dishwasher	Refrigerator
POWER PACK 520	•	•	•	•	•	•	•									
POWER PACK 14.22	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
POWER PACK 14.15 FC	•	•	•	•	•	•	•	•	•	•	•					

AIR COMPRESSOR

NOMAD AIR COMPRESSOR 088795 70,00 €HT

NEW

INCLUDED

Nozzle set

USB-C / USB-C

5 INFLATION MODES

- Car (2.50 bars)
- Motorbike (2.40 bars)
- Ball (4.10 bars)
- Bike (0.55 bars)
- Favorites (1.40 bars)

Ultra light & Compact



INPUT USB-C

OUTPUT USB-A

OPTION

15 W USB-C Charger 087101 11,00 €HT

15 W USB-C Charger 087354

NOMAD AIR COMPRESSOR	LITHIUM Battery			AIR	INPUT	OUTPUT	cm	kg
	CAPACITY	TYPE	FULL CHARGE					
	2.5 Ah / 27.75 Wh	Lico02	2h15	10 bars	USB-C : 5V/2A	(x1) USB-A : 5V - 2.1A	6.4 × 5.65 × 17.55	0.61

MEMORY SAVER

NOMAD OBD MEMORY SAVER 085480 130,00 €HT

included

Clamps - 95 cm

Charger - 1.1 m

FULL PROTECTION

Ultra light & Compact

Lithium battery INSIDE

2 POSSIBILITIES

Normal use

Keep using Nomad OBD even when discharged

INSIDE	MEMORY SAVER		cm	kg
	OBD < 4 A	< 4 A		
Li-ion 12V - 2 Ah			14.5 × 7.2 × 3.5	515 g

Connected to booster

CABLE OBD - Câble OBD - Kabel für OBD



MEMORY AUTO SAVE CABLE OBD Fuse 7,5 A - 1,5 m 054202 23,00 €HT

EV CHARGING

Rechargement EV • Laden für Elektrofahrzeuge • Carga de EV • Ricarica per veicoli elettrici

6 A > 32 A

Power Grid		RECHARGE TIME (20 to 100%)*															
		230 V (1 ph)								400 V (3 ph)							
		6 A 1.4kW	8 A 1.8kW	10 A 2.3kW	13 A 2.9kW	16 A 3.7kW	20 A 4.6kW	32 A 7.4kW		6 A 4.1kW	8 A 5.5kW	10 A 6.9kW	13 A 8.9kW	16 A 11kW	20 A 14kW	32 A 22kW	
Example of battery capacity	10 kW	6 h	4 h30	3 h30	3 h	2 h	1 h30	1 h		2 h	1 h30	1 h	50 min	40 min	-	-	
	20 kW	12 h	9 h	7 h	5 h30	4 h30	3 h30	2 h		4 h	3 h	2 h30	2 h	1 h30	-	-	
	50 kW	29 h	22 h	18 h	13 h	11 h	9 h	5 h30		9 h	7 h30	6 h	4 h30	3 h	2 h30	1 h30	
	60 kW	35 h	26 h	21 h	16 h	13 h	10 h30	6 h30		11 h30	9 h	7 h	5 h30	4 h	3 h30	2 h	
	70 kW	40 h	30 h	24 h	19 h	15 h	12 h	7 h30		13 h30	10 h	8 h	6 h30	5 h	4 h	2 h30	
	80 kW	46 h	34 h	27 h	22 h	17 h	14 h	8 h30		15 h30	11 h30	9 h	7 h	6 h	4 h30	3 h	

*Indicated values

INCLUDED		075320	080676
		✓	-
16 A / 1 ph		✓	-
13 A / 1 ph		-	✓
32 A / 3 ph		✓	✓
16 A / 1 ph		-	✓

more input options...

available on request

IP 65

23 × 16 × 9 cm 46 × 20.5 × 38 cm / 6 kg

SUPER PRO SMART EV CHARGE

6 → 32A 1ph / 3ph

075320 1 030,00 €HT 080676

TIMER FUNCTION Delay start 1h → 24h

EV CHARGING - PORTABLE

10/16 A 1 ph

028975 385,00 €HT

EV CHARGING - STANDARD CABLES

32 A 1 ph

079687 200,00 €HT

EV CHARGING - SPIRAL CABLE

32 A 1 ph

028982 300,00 €HT

32 A 3 ph

079694 280,00 €HT

	IP	U ₁	I ₁	P	⚡	⚡	↔	⚡
SUPER PRO SMART EV CHARGE	65	1 ph 3 ph + N	6/8/10/13/16/20/32 A	1,4 → 22kW	•	—		Type 2
EV CHARGING PORTABLE	66	1 ph	10 / 16 A	2,3 / 3,7kW	•	—		Type 2
EV CHARGING SPIRAL CABLE	66	1 ph	32 A	7,4 kW	—	•		Type 2
EV CHARGING STANDARD CABLES	55	1 ph	32 A	7,4 kW	—	•		5 m
	55	3 ph	32 A	22 kW	—	•		

OPTION

21 × 43 × 57 cm 060432 159,00 €HT

IP67

EV BATTERY ACCESSORIES

EQUIPMENT FOR EV AND HYBRID APPLICATIONS - Équipements pour opérations sur véhicules électriques & hybrides - Ausrüstung für den Betrieb von Elektro- und Hybridfahrzeugen

FACE SHIELD WITH HEADBAND
- ÉCRAN FACIAL AVEC SERRE-TÊTE
068018 55,00 €HT



INSULATING GLOVES (T10)
- GANTS ISOLANTS (T10)
068025 92,00 €HT



JACKET - Veste - Jacke

98% cotton,
2% antistatic
EN ISO 11612
A1+A2-B1-
C1-E3-F1
S (40/42)
046368 120,00 €HT
M (44/46)
046375 120,00 €HT
L (48/50)
046382 120,00 €HT
XL (52/54)
046399 120,00 €HT
XXL (56/58)
046412 120,00 €HT
IEC 61482-2
Class 1-4kA
EN 1149-5
EN ISO 11611
Class 2-A1
& A2
EN 14404
+A1
Type 2



TROUSERS - Pantalon - Hose

98% cotton,
2% antistatic
EN ISO 11612
A1+A2-B1-C1-E3-F1
S (40/42)
046313 135,00 €HT
M (44/46)
046320 135,00 €HT
L (48/50)
046337 135,00 €HT
XL (52/54)
046344 135,00 €HT
XXL (56/58)
046351 135,00 €HT
IEC 61482-2
Class 1-4kA
EN 1149-5
EN ISO 11611
Class 2-A1
& A2
EN 14404
+A1
Type 2

Working zone warning kit
- Kit pour le balisage de la zone d'intervention
- Kennzeichnungsset für Hochvolt-Bereiche
064409 525,00 €HT

Red and white warning pole - Balise de signalisation rouge et blanche	x 4
Red and white bounding line - Chaîne de délimitation rouge et blanche	x 1
Sign board "Danger, working area EHV" - Pancarte de signalisation "Danger, zone de travail VEH"	x 2





EV BATTERY LIFT

1T MOBILE LIFTING TABLE WITH HYDROPNEUMATIC PUMP
- Table élévatrice mobile 1 tonne avec pompe hydropneumatique - Mobiler 1-Tonnen-Hubtisch mit hydropneumatischer Pumpe



1.2T LIFTING TABLE FOR ELECTRIC VEHICLE BATTERIES
- Table de levage 1.2T pour batteries de véhicule électrique - 1,2T Hubtisch für Elektrofahrzeugbatterien

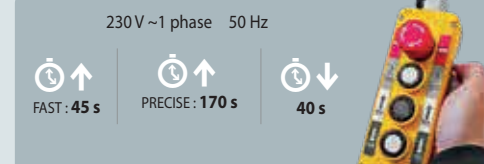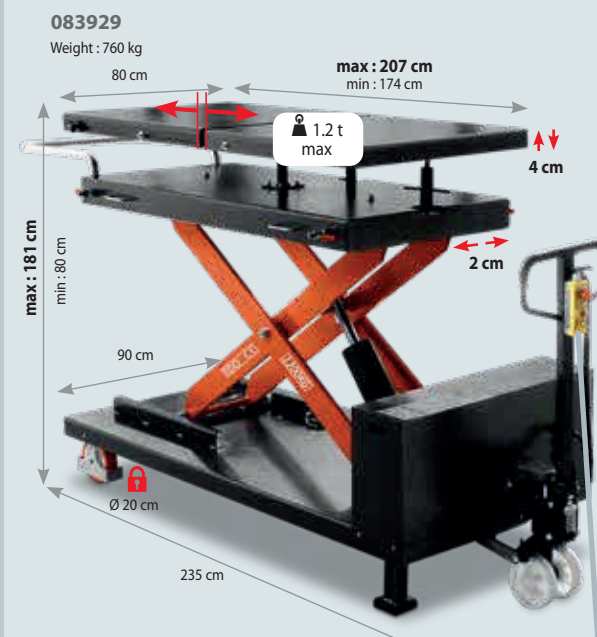


BATTERY LIFT

JOBSITE XL HAND TROLLEY
039568 400,00 €HT
18.3 kg 66 x 47 x 20 cm / 19.5 kg



MULTITOOL TRUCK
067158 2 050,00 €HT
90 kg
123 x 79 x 39 cm / 95 kg

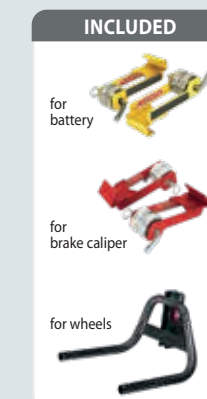

WORKSHOP EQUIPMENT

ROUND STOOL WITH TOOL STORAGE

- Tabouret - Werkstatt-Rollhocker

057555 **63.00 € HT**
38 x 38 x 44 cm - 5.2 kg
⊗ 41 x 19 x 41 cm / 5.6 kg



3-DRAWER WORKSHOP STOOL

- Tabouret d'atelier 3 tiroirs - Werkstatthocker 3 Schubladen


079878 **122.00 € HT**
47 x 35 x 43 cm / 12 kg
⊗ 38.5 x 37 x 38.5 cm / 13 kg



MECHANICS CREEPER WITH TILTING HEADREST

- Chariot de visite - Werkstatt-Rollliege

057548 **53.00 € HT**
102 x 43 x 11 cm / 5.3 kg
⊗ 104 x 45 x 13 cm / 6 kg

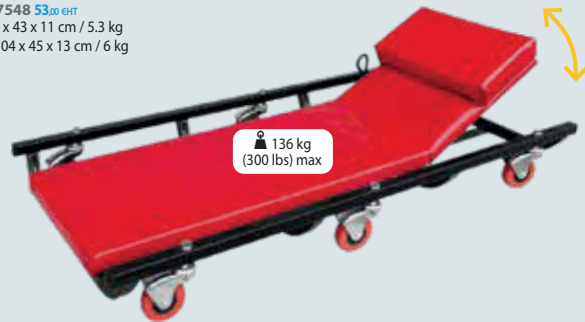

2 IN 1 MECHANICS CREEPER

- Chariot de visite 2 en 1 - Werkstatt-Rollliege

079861 **78.00 € HT**
102 x 40 x 14 cm
⊗ 40 x 13 x 63 cm - 7.6 kg



PLASTIC STOOL WITH TOOL STORAGE

- Tabouret en plastique avec rangements - Kunststoffhocker

085916 **60.00 € HT**
3.9 kg
⊗ 61 x 36 x 16 cm / 4.6 kg



FOLDING STEP STOOLS - Marche pieds (Aluminium)

- Arbeitspodest klappbar

080041 **74.00 € HT**
7.3 kg
⊗ 100 x 39.5 x 19 cm / 8.1 kg




ALU

150 kg max

057562 **121.00 € HT**

7.9 kg
⊗ 102 x 39 x 19 cm / 8.5 kg

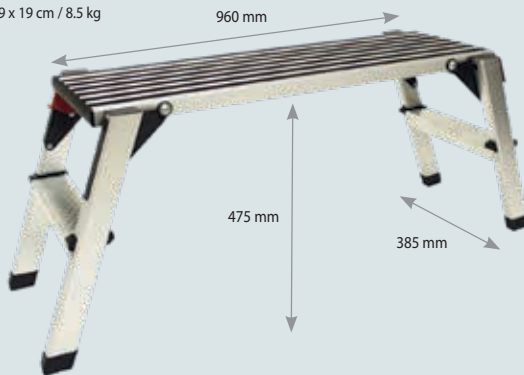


ALU

150 kg max

058552 **332.00 € HT**

⌒ 113 x 41 x 16 cm / 16 kg
⊗ 117 x 42 x 17 cm / 17 kg

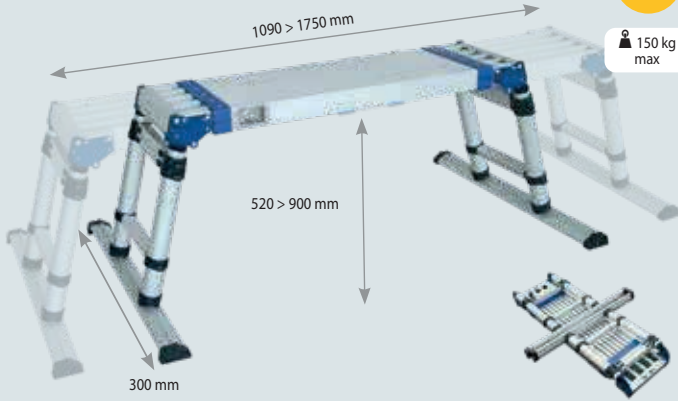

ALU


150 kg max

WORKSTATION PREMIUM 5 DRAWERS

- Servante premium 5 tiroirs

076143 **510.00 € HT**

⚖ 64 kg
Capacity 320 kg

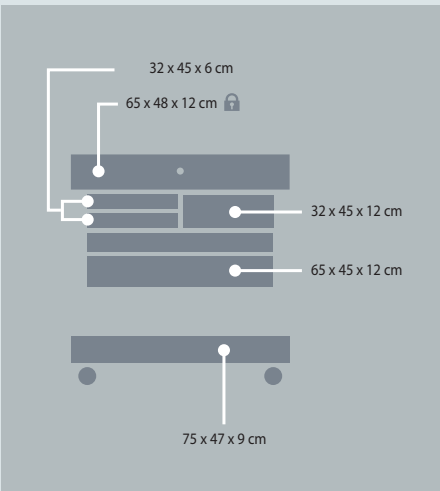

PLASTIC TROLLEY 3 SHELVES

- Servante plastique 3 plateaux

087309 **128.00 € HT**



WORKSTATION 3 SHELVES 1 DRAWER

- Servante d'atelier 3 plateaux 1 tiroir

088023 **175.00 € HT**



ACCESSORIES

MANUAL TOOL FOR BLIND RIVETS
- Riveteuse manuelle - Manueller Blindnietgerät

For BLIND rivets - Pour rivets POP
- Für Blindniet

Steel / Acier

Ø 3.2/4.0/4.8/6./6.4

Alu

Ø 3.2/4.0/4.8/6./6.4

061323

170,00 € HT

Made in Taiwan

MAGNETIC COVER - Couverture magnétique - Magnetschutzdecke

1.06 m x 0.6 m

061446

43,00 € HT

INFRARED THERMOMETER
- Thermomètre infrarouge

Adjustable emissivity:
0.10 ~ 1.00

079922

34,00 € HT

-50 / +600 °C

-58 / +1112 °F

GLOVES - Gants - Handschuhe - Guantes

Anti-cut
- Anti coupure
T9
045897

9,50 € HT

EN388
4342C

✓ touch screen friendly
- écran tactile

High resistance anti-cut
Anti coupure haute résistance
EN 420
EN 388:4121
T9 : 045910

62,00 € HT

T10 : 045927

62,00 € HT

High dexterity anti-cut
- Anti coupure haute dextérité
EN 420
EN 388:1121
T9 : 045903

55,00 € HT

T10 : 045934

61,00 € HT

Cult. Leather
Leder

T10
064188

14,00 € HT

EN388
2011 X

EN420
2003
+A1

HEAT COVER - Couverture anti-chaleur - Hitzeschutzdecke - Manta anti-calor - Protecção anti-aquecimento

PROTEC 550
550°C/1000°F - Class M0
2 m x 2 m - 580 g/m²
050495

76,00 € HT

PROTEC 1200
1200°C/2200°F - Class M0
1.75 m x 1.5 m - 1200 g/m²
050204

192,00 € HT

PROTEC 1300
1300°C/2400°F - Class M0
XL : 2 m x 1.8 m 620 g/m²
053595

197,00 € HT

PROTEC 1300L
1300°C/2400°F
XL : 2 m x 1.8 m 420 g/m²
060500

167,00 € HT

RESPIRATORY MASKS - Masques respiratoires - Atemschutzmaske - Máscaras respiratorias

FFP3 - EN 140 / EN 143 / EN 166
(x1) Size M/L
037021

115,00 € HT

FFP3 - EN 140 / EN 143
(x1) Size M/L
037014

53,00 € HT

Étui / Case
037045

42,00 € HT

FFP3 - EN 143 : 2000 P3
Anti poussières / Anti odeurs
037038

26,00 € HT

PROTECTION GOGGLES
- Lunettes de protection - Schutzbrillen

EN 166

Shade/IR0
042810

5,00 € HT

Shade/IR0
042827

5,40 € HT

Shade/IR5
042841

32,00 € HT

Shade/IR0
047778

24,00 € HT

Shade/IR0
047792

23,00 € HT

SET OF 2 MAGNETS
- Jeu de 2 aimants - Schweißmagnet

(x2)
052291

48,00 € HT

JUMPER CABLES

320 A > 1000 A

056206								
564015								
056404								
056602								
056190								
056312								
056329								
056336								
056343								
056558								
056541								
056619								

PRO BRASS CLAMPS

BRASS CLAMPS, NON-INSULATED - Pincés laiton, non isolées - Messingklémme, nicht isoliert - Pinzas de latón, no aisladas - Morsetti in ottone non isolati

MADE IN CHINA

					TYPE
056206	320 A	3 m	—	16 mm²	(CCA)
564015	500 A	3 m	—	25 mm²	(CCA)
056404	700 A	4,5 m	—	35 mm²	(CCA)
056602	1000 A	5,1 m	—	50 mm²	(100% Cu)
056190	1000 A	4,5 m	INCLUDED	50 mm²	(100% Cu)

MADE IN FRANCE

PRO INSULATED CLAMPS

INSULATED CLAMPS - Pincés isolées - Isolierte klémme - Pinzas aisladas - Morsetti isolate

MADE IN CHINA

		ESSENCE BENZINE PETROL	DIESEL				TYPE	DIN 72553
056312	200 A	1,5l		3 m	—	10 mm²	≈ Ø Cu	—
056329	320 A	2,5l		3 m	—	16 mm²	≈ Ø Cu	•
056336	500 A	5,5l	3l	3,5 m	—	25 mm²	≈ Ø Cu	•
056343	700 A	7l	4l	4,5 m	—	35 mm²	≈ Ø Cu	•
056558	1000 A	7l	4l	4,5 m	INCLUDED	50 mm²	(100% Cu)	—

MADE IN FRANCE

SUPER PRO INSULATED CLAMPS

				TYPE					TYPE
056541	700 A	4,5 m	35 mm²	100% Cu	056619	1000 A	5 m	50 mm²	100% Cu

87

ACCESSORIES

86

ACCESSORIES



Current clamp
- Pince
ampèremétrique
- Strommesszange

400 A
053991 **175,00 € HT**
600 A
053984 **225,00 € HT**

CLAMPS - Pinces • Klemmen • Pinzas • 充电夹

	40 A	60 A	200 A	300 A	600 A	650 A	700 A	850 A	1000 A	300 A	600 A
I 100%	30 A	60 A	100 A	200 A	120 A	120 A	120 A	170 A	200 A	-	-
I peak	75 A	150 A	200 A	300 A	600 A	650 A	700 A	850 A	1000 A	-	-
max	×↕ 30 mm	×↕ 25 mm	×↕ 38 mm	×↕ 45 mm	×↕ 40 mm	×↕ 35 mm	×↕ 28 mm	×↕ 44 mm	×↕ 55 mm	×↕ 38 mm	×↕ 38 mm
max	2.5 mm²	16 mm²	16 mm²	25 mm²	35 mm²	25 mm²	25 mm²	35 mm²	70 mm²	50 mm²	95 mm²

CABLE LUGS - Cosses • Terminal Kabelschuhe • Kabelschuhe

	16 mm²	M10	×10	038219 60,00 € HT		75 mm²	M16	×10	038257 80,00 € HT		25 mm²	M5	×100	047525 102,00 € HT		10 mm²	M16	×100	047501 29,00 € HT
	25 mm²	M10	×10	038226 70,00 € HT		125 mm²	M15	×5	038264 58,00 € HT		35 mm²	M6	×100	047532 122,00 € HT		16 mm²	M15	×100	047518 42,00 € HT
	35 mm²	M14	×10	038233 85,00 € HT							70 mm²	M10	×100	047556 29,00 € HT		95 mm²	M10	×50	047570 309,00 € HT
	50 mm²	M14	×10	038240 105,00 € HT															


CABLES EN 60245-6/H01N2-D (Rubber - Caoutchouc)	⊗	↔ L		A (60%)	A (35%)
	16 mm²	100 m	046252	121	131
		↖ x m	046207 8,20 € HT		
		5 m	045408 53,00 € HT		
	25 mm²	100 m	046603	165	185
		↖ x m	046306 12,20 € HT		
		100 m	046702		
	35 mm²	↖ x m	046405 15,30 € HT	211	243
		100 m	046801		
		↖ x m	046757 20,80 € HT		
	50 mm²	100 m	046832 29,20 € HT	275	323
		↖ x m	046832 29,20 € HT		
		↖ x m	046863 40,40 € HT		

HIGH FLEXIBILITY ELECTRICAL CABLES	⊗	↔ L		A (60%)	A (35%)
	10 mm²	100 m	054882	88	92
		20 m	056107 87,20 € HT		
		100 m	054905		
	16 mm²	100 m	056121 116,00 € HT	120	130
		20 m	054929		
		20 m	056145 175,00 € HT		
	25 mm²	100 m	054943	164	184
		20 m	056169 240,00 € HT		
		20 m	056138 180,00 € HT		
	35 mm²	100 m	054967	210	240
		20 m	056176 341,00 € HT		
		20 m	056183 341,00 € HT		

DINSE CONNECTORS - Connecteurs Texas • Stecker • Conectores

	I max	mm²	mm	mm	Compatibility	Ref.
	200	10/25	14	9	CM 25.14, CF 25.14	x1 045507 9,40 € HT
	300	35/50	21	13	CM 50.21, CF 50.21	x1 045606 11,20 € HT
	400	50/70	21	13	CM 70.21	x1 047488 17,00 € HT
	200	10/25	14	9	CF 25.14	x20 045668 44,30 € HT
	300	35/50	21	13	CF 50.21	x10 045613 56,00 € HT
	400	50/70	21	13	CF 70.21	x5 045750 34,00 € HT
	500	70/95	24	13	CF 95.24	x5 047495 79,00 € HT
	200	10/25	14	9	CM 25.14	x30 045651 142,00 € HT
	300	35/50	21	13	CM 50.21	x10 045620 59,00 € HT
	400	50/70	24	13	CM 70.21	x5 045736 41,00 € HT
	500	70/95	24	13	CM 95.24	x5 072374 44,00 € HT
	200	10/25	14	9	CF 25.14	x30 045651 142,00 € HT

ANTI-ARC PROTECTION

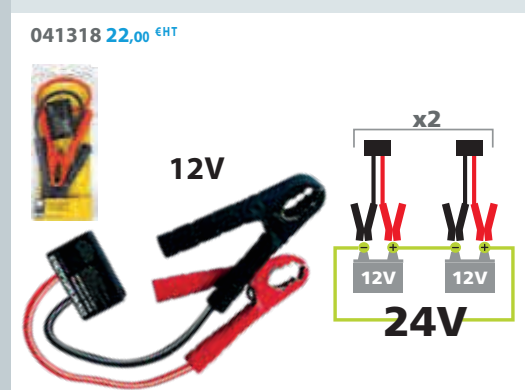


ACIDIMETER (PH METER)



ADJUSTABLE BATTERY CARRIER




BATTERY TERMINAL CLEANING BRUSH

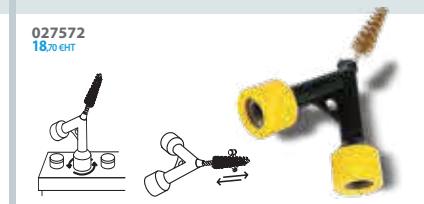

QUICK CONNECTORS



FUSES • Fusibles • Sicherungen • Fusibles • 保险丝

 Ø5 20 mm	×5		×10	 Ø10 mm 80 mm	×2	 30 mm	×2	 30 mm	×2	 60 mm	×2	 30 mm	×2	 30 mm	×2			
6.3 A 054578 4,00 € HT		10 A 054530 4,00 € HT		100 A 054486 7,40 € HT		100 A 054394 4,30 € HT		150 A 027930 4,10 € HT		200 A 054547 6,30 € HT		M5 055568 7,00 € HT		M10 054561 6,80 € HT		M5 40 A 054646 10,20 € HT		M6 40 A 071599 6,70 € HT
10 A 056527 4,00 € HT		15 A 054493 4,00 € HT								250 A 055568 7,00 € HT						50 A 054622 5,80 € HT		
		20 A 054509 4,00 € HT								300 A 054561 6,80 € HT						80 A 054653 6,90 € HT		
		25 A 054516 4,00 € HT														125 A 054585 7,30 € HT		
		30 A 054523 4,00 € HT														150 A 054639 7,00 € HT		
		40 A 054554 4,00 € HT																

BATTERY TERMINAL • Cosses batterie • Polklemmen • Terminales batería • 电池端子

	×1	×25	×25	×25	×25	×25	×25	×25
054400 8,10 € HT	054431 71,00 € HT	054332 76,00 € HT	054417 88,00 € HT	054356 84,00 € HT	054370 163,00 € HT	054424 88,00 € HT	054363 84,00 € HT	054387 163,00 € HT

	67 W Fast USB-C Charger ✓ Nomad Power PRO 901 FC 087132 36,00 € HT
	15 W USB-C Charger ✓ Nomad Power 401 / 501 ✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC 087101 11,00 € HT
	15 W USB-C Charger ✓ Nomad Power 401 / 501 ✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC 087354

SOLAR POWERED CHARGER WITH ACCESSORIES • Kit solaire de maintien de charge avec accessoires • Solarpanel zur Ladeerhaltung mit Zubehör • Kit solar de mantenimiento de carga



SOLAR PANEL • Panneau solaire • Solarpanel • Panel solar



INSPECTION LAMP - Lampe inspection - Inspektionslampen


FRONTAL INSPECTION LAMP 280 L

100-280 lumens

3 W COB LED
80 CRI+, 6500 K
3.7 V - 1500 mAh Li-po
micro USB charging
operating time
High position : 2 h
Low position : 6 h

IP 65 / 7.8 x 4.7 x 4.2 cm
40 x 8.8 x 5.5 cm / 200 g

060845 36.00 € HT



HANDS-FREE TORCH 360 L

180-360 lumens

3.7 V - 2200 mAh Li-ion
Charging time: 3.5 h
operating time
High position : 3 h
Low position : 6 h

26 x 15.9 x 2.5 cm
3.5 x 30 x 16 cm

088559 29.00 € HT

NEW



PORTABLE LAMP 400 L

400 lumens

COB LED
Li-ion
Charging time : 8 h
operating time
High position : 2.5 h
Low position : 5 h
Top light (1 W) : 6 h

23 x 6.5 x 4 cm / 480 g
13 x 7 x 23.5 cm

059153 34.00 € HT



INSPECTION LAMP MINI 350 L

0-350 lumens

COB LED
3.7 V - 1100 mAh Li-ion
USB charging (3 h)
operating time
3 > 6.5 h

IP 20

075894 47.00 € HT

50 lumens
120 lumens
350 lumens



INSPECTION LAMP PRO 800 L


120-800 lumens

COB LED
3.7 V - 2600 mAh Li-ion
USB charging (4 h)
operating time
2.5 > 9 h

IP 54

075900 52.00 € HT

120 lumens
120 / 400 lumens
150 / 800 lumens

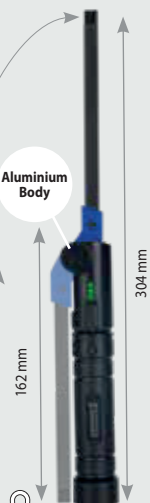

UNDER BONNET LAMP - Lampe sous capot - Leuchte für Motorhaube

UNDER BONNET LAMP 600 L

500-1000 lumens

120 COB LED
3.7 V - 4000 mAh Li-ion
charging time : 10/12 h
operating time
High position : 4 h
Low position : 8 h

26 x 10 x 10 cm
2.3 kg
23.5 x 12 x 69.5 cm

059962 87.00 € HT



UNDER BONNET LAMP 800 L

250-800 lumens

120 COB LED
3.7 V - 4000 mAh Li-ion
charging time : 10/12 h
operating time
High position : 3 h
Low position : 6 h

2 kg
60.7 x 15 x 11.3 cm

058002 78.00 € HT



WORKLIGHT WITH TRIPOD - Projecteur sur trépied - Arbeitsleuchte mit Standfuß

TRIPOD LAMP 3000 L

3000 lumens

35 W COB LED
2 m power cord
IP 44
4.1 kg
103 x 21.5 x 10 cm

059979 85.00 € HT



TRIPOD LAMP 4000 L

4000 lumens

3 x 20 COB LED, total 60 LED
3 m power cord
6.4 kg
22 x 16 x 116 cm

059986 125.00 € HT



AUTOMOTIVE BATTERIES

Batteries de démarrage - Starterbatterien - Baterías de arranque
- Automotive accu's - Baterías de Automóvil - Minotapic
- аккумуляторы - Пусковые батареи - 汽车启动电池


Curves	Pb* (except gel)	Pb* (incl. gel)	Battery overcharged protection	100% charged	Maintenance	Battery desulphation	Fast Charge	Fast Charge ++
W	✓	-	-	✓	-	-	-	-
W2	✓	-	✓	-	-	-	-	-
WU	✓	-	✓	-	✓	-	-	-
WUoU	✓	✓	✓	✓	✓	-	-	-
IWUoU	✓	✓	✓	✓	✓	✓	✓	-
I REGULATED UoU FAST CHARGE	✓	✓	✓	✓	✓	(except Artic)	✓	✓
7 STEP GYSFLASH Pb	✓	✓	✓	✓	✓	✓	✓	✓

* Pb : AGM / EFB / VRLA / Liquid / SLI / SLA / Calcium...


GYSFLASH Lithium

8 STEP Li-ion 8 STEP LiFePO4 9 STEP Li-ion 9 STEP LiFePO4


LiFePO4 / Li-ion / Li-Po / NMC / LCO / MCO / NCA...

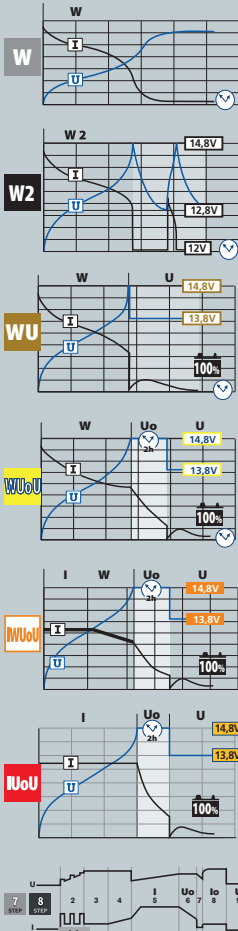

Parallel

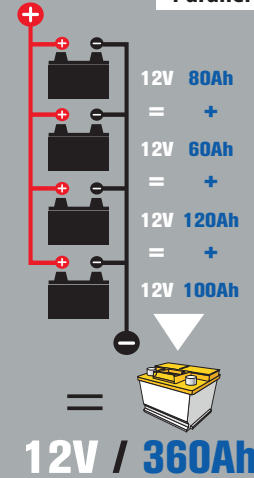

Serial

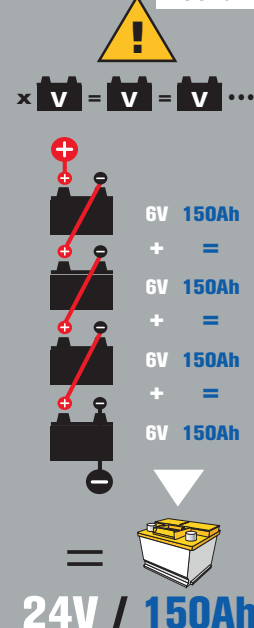


MARKETING



Catalogs and posters available for download on our website www.gys.fr



A - Marquee 3 x 3 m 098022 241.00 € HT
B - Open Marquee 2 x 2 m 098039 125.00 € HT
C - Banner 3 x 0.50 m 098015 57.00 € HT



Display stand - Podium de présentation - Podest (machines not included)


063204 200.00 € HT A : 45 cm, B : 50 cm, C : 50 cm
063211 275.00 € HT A : 80 cm, B : 50 cm, C : 50 cm



Retail display space with 2 shelves - Linéaire de vente avec 2 étagères - Lochwandregal mit 2 Böden (machines not included) 060784 900.00 € HT



Type	FA1	FA2	SB1
complete - complet - komplett	062429 7556.00 € HT	062443 9677.00 € HT	061149 5760.00 € HT
without display stand - sans linéaire - ohne Regal	062436 6656.00 € HT	062450 8627.00 € HT	062412 4823.00 € HT

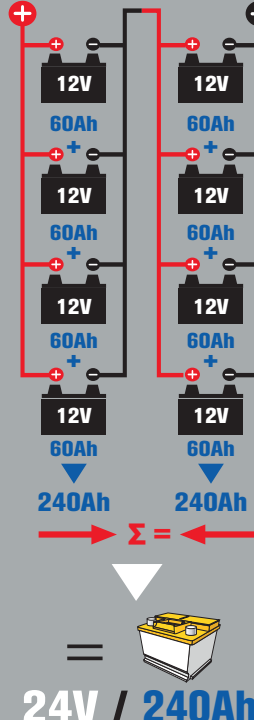



INVEST IN THE FUTURE

CHARGE

2026

GYS France

Headquarters

1 rue de la Croix des Landes
CS 54159
53941 Saint-Berthevin - Cedex
Laval - France
Tel +33 2 43 01 23 60
E-mail service.client@gys.fr



ZI, 134 bd des Loges
53941 Saint-Berthevin
Laval - France

Logistics center

2 Rue Jean Dausset
53810 Changé - France
Tel +33 2 43 01 54 33

GYS Germany

Professor-Wieler
Straße 11
52070 Aachen
Deutschland
Tel +49 241/189-23-710
Fax +49 241/189-23-719
E-mail aachen@gys.fr

GYS UK

Unit 3 - Great Central Way
Rugby - Warwickshire
CV21 3XH
United Kingdom
Tel +44 1926 338 609
Fax +44 1926 429 764
E-mail uk@gys.fr

GYS Italia

Via Porta Est, 7
30020 Marcon - VE
Italia
Tel +39 041 53 21 565
E-mail italia@gys.fr

GYS Ibérica

Avenida Pirineos 31
Nave 9
San Sebastian de los Reyes
28703 Madrid
España
Tel +34 917 409 790
E-mail iberica@gys.fr

GYS China

Lot N°15 - 6666 bd Songze
201706 Qingpu
Shanghai - China
Tel +86 6221 4461
Fax +86 5226 0067
www.gys-china.com.cn
E-mail
contact@gys-china.com.cn

LinkedIn
 YouTube
 WeChat
 Facebook
 Instagram



www.gys.fr



Distributed by